


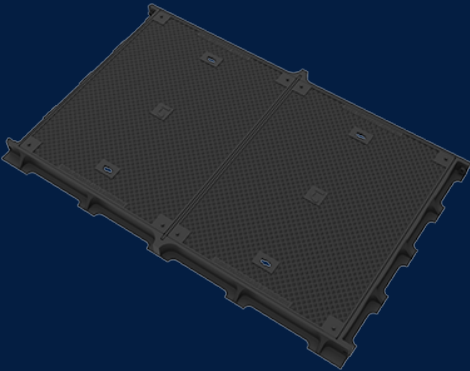


50201091

Product Code: 50201091

ASSEMBLY MANHOLE FRAME AND COVER 2 PART

-  MATERIAL
Ductile Cast Iron
-  SIZE
1370mm (L) x 898mm (W) x 60mm (D)
-  LOAD RATING
B



Features & benefits

- Superior design that meets Australian Standards

Infrastructure Products Australia cast iron cover range is designed and built up to a Class B load rating, meeting the Australian Standard AS/NZ 3996.
- Locking and security capabilities

Our cast iron cover range has locking and security capabilities to ensure the utmost protection for your valuable assets.
- Personalised for your Client, Customer or Project

We can customise these cast iron covers to showcase a company's company or the cover's unique application.



Full specifications

Material	Ductile iron covers are manufactured from spheroidal graphite cast iron to achieve specified tensile strength and elongation requirements. Infrastructure Products Australia' ductile iron covers are in accordance with requirement specified in AS1831 and AS3996. Ductile iron covers can be utilised in variety of applications to meet strength and durability requirements.
Load Rating	Cast iron covers are manufactured up to a Class B load rating (ultimate limit state design of 900kN) under the Australian Standard AS/NZ 3996, thereby making cast iron covers suitable for docks, wharves and airport runways.