

MULTIduct™ is an innovative, lightweight and structural multiple duct cable protection system offering a modern alternative to traditional cable ducting systems.

#### MATERIAL


High Density Polyethylene (HDPE)

#### SIZE

1116mm (L) x 385mm (W) x 385mm (D)

#### LOAD RATING

B

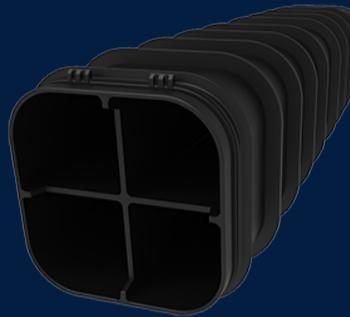

## Features & benefits

### High Crush Strength

Requiring shallower burial depths and with greater crush resistance than conventional methods, MULTIduct™ does not require any concrete or specialist surround due to its high strength and robust nature. Excavated material can be reused during re-installation reducing time, cost and heavy plant.

### Quick Assembly with Secure One Click Connection System

MULTIduct™ offers a unique 'push fit system' that is fast and easy to install. During cable pulling, the unique push-fit connection eliminates any disengagement of the units once installed.

### Durable

Less susceptible to drop related damages, MULTIduct™ offers a durable and lightweight unit that can be easily transported and moved on site. MULTIduct™ units also incorporate large radius corners to stop rodents biting through the duct unit to gain access to cabling.

## Full specifications

### Material

Manufactured from high density polyethylene (HDPE), MULTIduct™ offers a lightweight, high strength to weight unit. With parts weighing below 20kg MULTIduct™ offers significant health and safety advantages permitting a single person lift and install.

### Load Rating

Infrastructure Products Australia's MULTIduct™ manufactured to a Class B load rating (ultimate limit state design load of 10kN) under the Australian Standard AS/NZ 3996

### How it works

The MULTIduct™ system offers a wide range of accessories to deal with tight turns, elevations, adjustable height on site, natural curvature and other



## Contact Us

Email: [sales@cubis-systems.com.au](mailto:sales@cubis-systems.com.au)

Phone: 1800 665 356