




PLAN VIEW

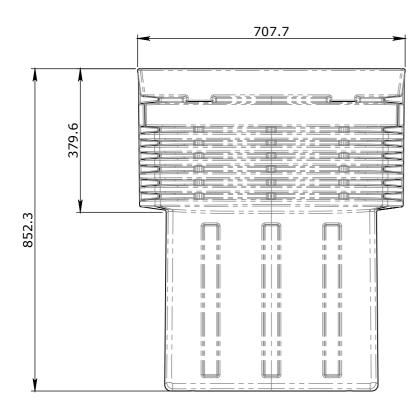

ELEVATION VIEW

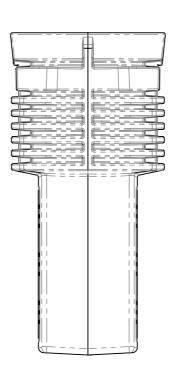

END VIEW

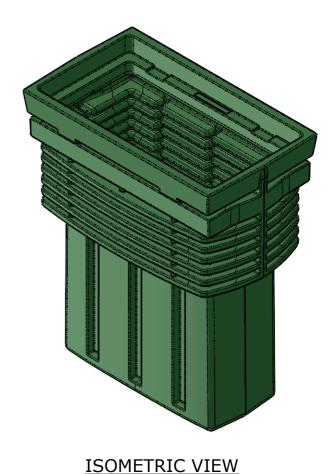

TOLERANCE:

±5mm

TOLERANCE NOTES:

1. CONCRETE TOLERANCES TO BE INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES


2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE

3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY


4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE

5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS

6. SURFACE FINISH - CLASS 4 (AS3610.1)



±4mm PER 1M WIDTH 1mm IN 200mm UP TO A MAXIMUM OF 20mm IN 1M LENGTH



CARNGHAM ROAD BALLARAT, VIC 3351 (03) 5335 8741

91 STRADBROKE STREET HEATHWOOD, QLD 4110 (07) 3714 0444 THE INFORMATION DISCLOSED IN

A CRH COMPANY

AUSTRALIA TO BE COPIED, REPRODUCED, OR GIVEN TO ANY OTHER PARTY IN ANY FORM AND THAT ALL COPYRIGHT, DESIGNS AND PATENTS VEST IN CUBIS SYSTEMS AUS.

1	DRAFTED DATE:	PART/PRODUCT #	QUOT	ΓE #	0	RDER #	
	4/11/2021	5020115850201158					
	DRAFTED BY:	REINFORCEMENT COMPUTATION	PIT #	:	Г	TEM TYPE	
l	NBRADIC						
l	DATE LAST SAVED:	CLIENT					
ı	4/11/2021						
	LAST SAVED BY:	PROJECT DESC					
l	NBRADIC	power microtuff reclaim black					
	⊕ €=	50201158					REV.
1	DRAWN TO AS 1100	DRAWING #	PAGE	SHEET SIZE	SCALE		

1/1

A3

1:10

50201158