


- CONCRETE NOTE:
 1. REFER TO GENERAL TOLERANCES UNO
- GRADE OF CONCRETE 40MPa
- ALL LIFTING POINTS TO BE USED WHEN LIFTING
- MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPa AT THE TIME OF LIFTING
- REFER TO PRECAST CONCRETE INSTALLATION GUIDE V.1 2019 FOR INSTALLATION DETAILS
- REFER TO ANCON LIFTING ARRANGEMENT PLAN

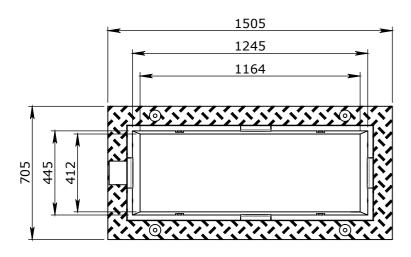

PLAN VIEW

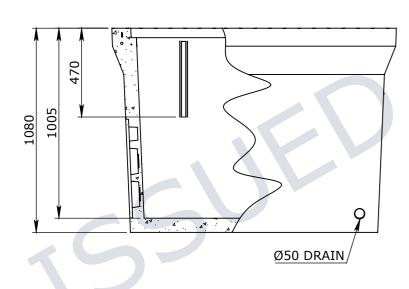

ELEVATION VIEW

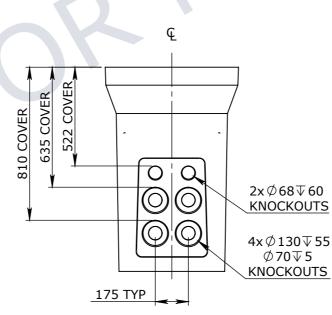

END VIEW

KNOCKOUT AREA TYPICAL BOTH ENDS

ISOMETRIC VIEW

SCALE 1:10

4x1.3T LIFTING ANCHORS

2x400mm UNISTRUT LONG WALLS ONLY

TOLERANCE NOTES:

1. CONCRETE TOLERANCES TO BE INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES

2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE

3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY

4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE

5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS

6. SURFACE FINISH - CLASS 4 (AS3610.1)

Rev DESCRIPTION DATE: BY: ECO#: REVISION CONTROL GENERAL TOLERANCES
NOMINAL: FLATNESS: (NOT INCLUDING BROOME FINISH 1M AND ABOVE UP TO 1000mm ±4mm PER 1M WIDTH 1mm IN 200mm UP TO A MAXIMUM OF 20mm TOLERANCE: IN 1M LENGTH ±5mm

CHANAKAA 13-01-2020 RPEQ DOCUMENT #:

LOGO/NAME

MOUNTING FOR CUBIS SYSTEMS COVERS

PLATE RECESS

848.03Kg CONCRETE FIBRE 40MPa



CARNGHAM ROAD BALLARAT, VIC 3351 (03) 5335 8741

2 STRADBROKE STREET HEATHWOOD, QLD 4110 (07) 3714 0444

THE INFORMATION DISCLOSED IN THIS DOCUMENT IS CONFIDENTIAL AND IS NOT WITHOUT THE EXPRESS CONSENT OF CUBIS SYSTEMS AUSTRALIA TO BE COPIED, REPRODUCED, OR GIVEN TO ANY OTHER PARTY IN ANY FORM AND THAT ALL COPYRIGHT, DESIGNS AND PATENTS VEST IN CUBIS SYSTEMS AUS.

CUBIS SYSTEMS AUSTRALIA CATALOGUE PRODUCTS

PIT CONCRETE BELLTOP 8 CLASS D

DRAWN TO AS 1100 DO NOT SCALE FROM SHEET				WING No: 1201060	
SHEET:	PAGE:	SCALE UNO:		DRAFTED DATE:	DRAFTED BY:
_ A3	1/1	1:20		28/05/2019	P.ADAMS