
- CONCRETE NOTE:

   1.
   REFER TO GENERAL TOLERANCES UNO

   2.
   GRADE OF CONCRETE 40MPa

   3.
   MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPa AT THE TIME OF LIFTING

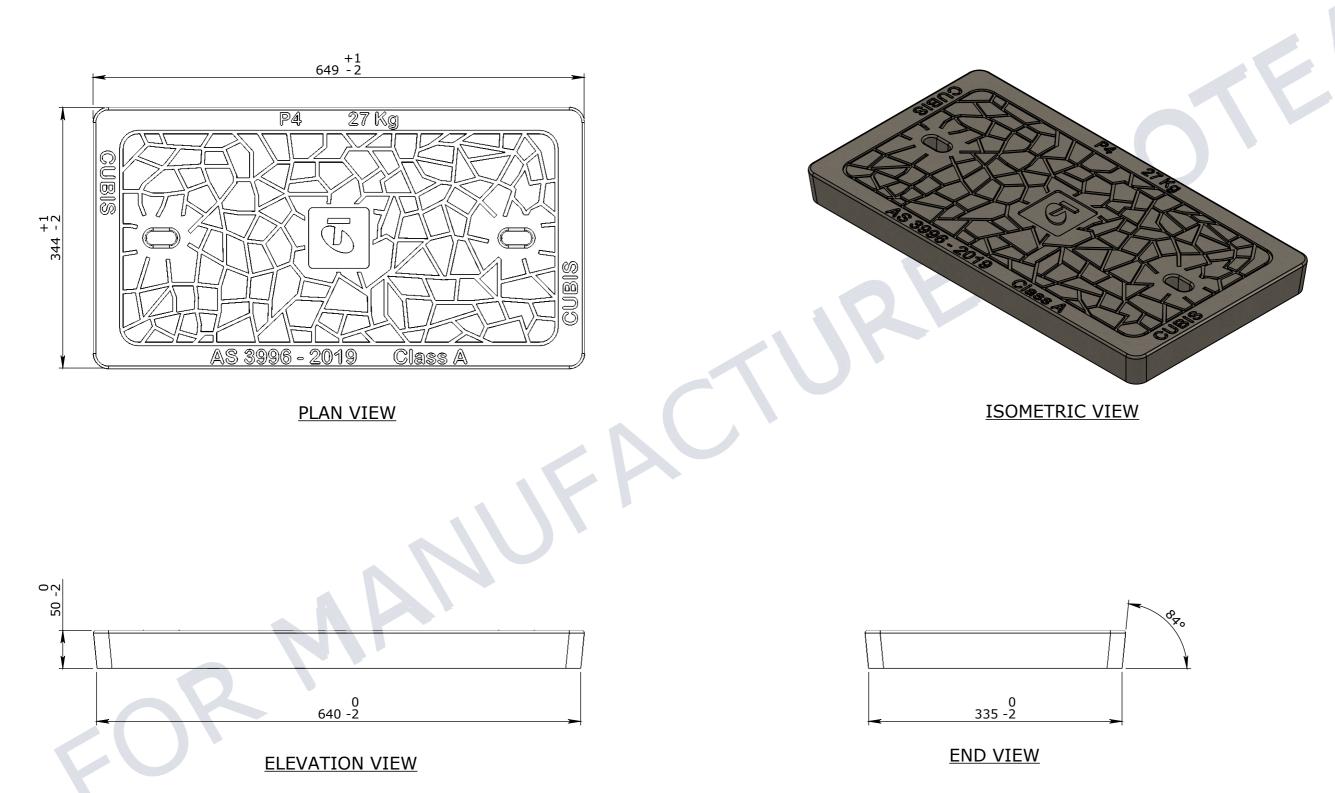

## UNCONTROLLED DOCUMENT WHEN PRINTED

TOLERANCE NOTES: 1. CONCRETE TOLERANCES TO BE INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES								CHK / APPR: ABEYSINGHE, CHANAKA DATE:	>.<	HEAD OFFICE: CARNGHAM ROAD BALLARAT, VIC 3351 (03) 5335 8741
2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE	Rev DESCI	RIPTION		D	DATE:	BY:	ECO#:	RPEQ DOCUMENT #:		ENGINEERING & DEVELOPMENT:
3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY		TOLERANCES			OL				CORIZ	2 STRADBROKE STREET HEATHWOOD, QLD 411
4. CONCRETE GRADE - 40MPA UNLESS	NOMINAL:	UP TO 1000mm	1M A	ND ABOVE		ESS: (NOT INCLUDING BRC		WEIGHT: 27Kg	515121015	(07) 3714 0444
5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS 6. SURFACE FINISH - CLASS 4 (AS3610.1)	TOLERANCE:	±5mm		m UP TO A MAXIMU F 20mm	M ±4	mm PER 1M IN 1M LENG			COPIED, REPRODUCED, OR GIVEN TO	IIS DOCUMENT IS CONFIDENTIAL AND NT OF CUBIS SYSTEMS AUSTRALIA TO E 0 ANY OTHER PARTY IN ANY FORM AND 0 PATENTS VEST IN CUBIS SYSTEMS AU

	PROJECT DESCRIPTION: CUBIS SYSTEMS AUSTRALIA CATALOGUE PRODUCTS											
	AX S <sup>TM</sup> P4 COVER CONCRETE TELSTRA CLASS A											
s the second sec												
	SHEET: A3	PAGE: 1/1	scale UN 1:5	):	DRAFTED DATE: 28/05/2018	DRAFTED BY:	U					

