



**CONCRETE NOTE:**


1. REFER TO GENERAL TOLERANCES UNO
2. GRADE OF CONCRETE - 40MPa
3. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPa AT THE TIME OF LIFTING

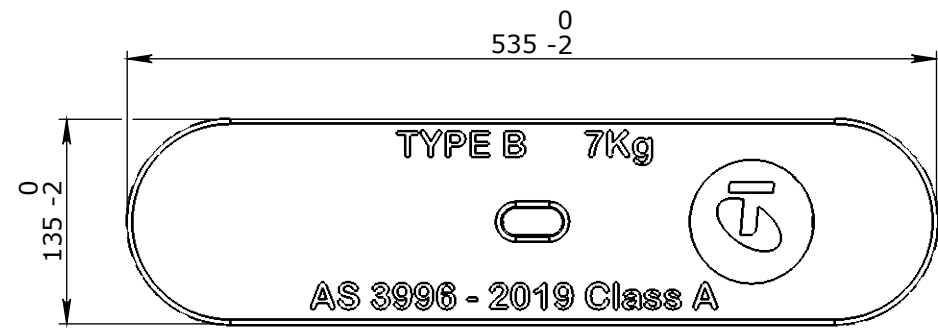


PLAN VIEW

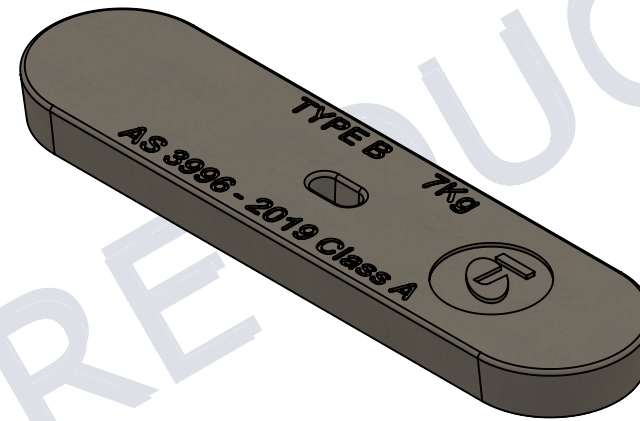

ISOMETRIC VIEW

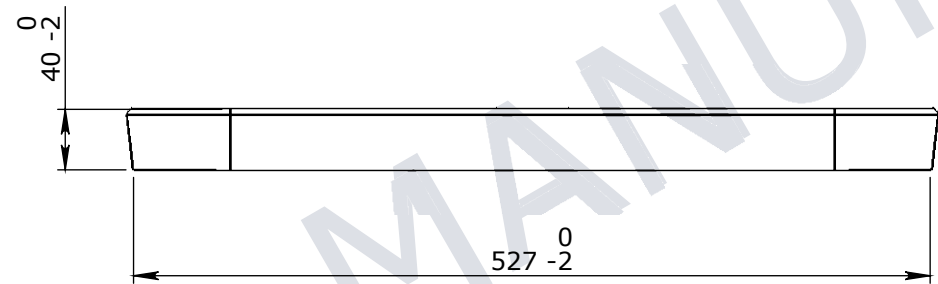

ELEVATION VIEW



END VIEW


UNCONTROLLED DOCUMENT WHEN PRINTED

- TOLERANCE NOTES:**
1. CONCRETE TOLERANCES TO BE IN CONJUNCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE
  2. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY CONCRETE GRADE - 40MPa UNLESS NOTED OTHERWISE
  3. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS
  4. SURFACE FINISH - CLASS 4 (AS3610.1)

Rev	DESCRIPTION	DATE:	BY:	ECO#:

<b>GENERAL TOLERANCES</b>		<b>REVISION CONTROL</b>	
NOMINAL:	UP TO 1000mm	1M AND ABOVE	FLATNESS: (NOT INCLUDING BROOME FINISH)
TOLERANCE:	±5mm	1mm IN 200mm UP TO A MAXIMUM OF 20mm	±4mm PER 1M WIDTH IN 1M LENGTH

CHK / APPR:	CA
DATE:	07-01-2020
RPEQ DOCUMENT #:	
WEIGHT:	7Kg
MATERIAL:	CONCRETE 40MPA
SURFACE TREATMENT:	



HEAD OFFICE:  
CARNINGHAM ROAD  
BALLARAT, VIC 3351  
(03) 5335 8741

ENGINEERING & DEVELOPMENT:  
2 STRADBROKE STREET  
HEATHWOOD, QLD 4110  
(07) 3714 0444

PROJECT DESCRIPTION:				
<b>CUBIS SYSTEMS AUSTRALIA CATALOGUE PRODUCTS</b>				
DRAWING NAME: AX S™ TYPE B COVER CONCRETE CLASS A				
DRAWN TO AS 1100 DO NOT SCALE FROM SHEET	DRAWING No:	REV:		
SHEET: A3	PAGE: 1/1	SCALE UNO: 1:5	DRAFTED DATE: 25/05/2018	DRAFTED BY: <b>1</b>