


- CONCRETE PRODUCT NOTE:

 1. REFER TO GENERAL TOLERANCES UNO
 2. GRADE OF CONCRETE 40MPA
 3. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPA AT THE TIME OF LIFTING

WELDMENT CUT LIST										
ITEM NO.	QTY.	DESCRIPTION								
1	1	P1 & 3 COMMUNICATIONS COVER								
2	1	P1 & 3 CONCRETE COVER REO								
3	1	LIFTING PLATE								

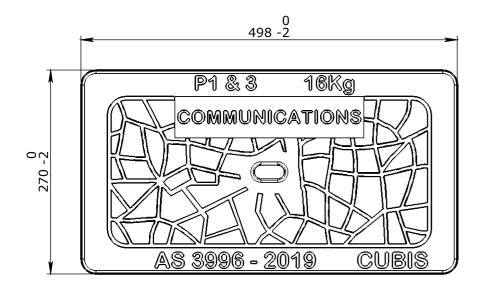


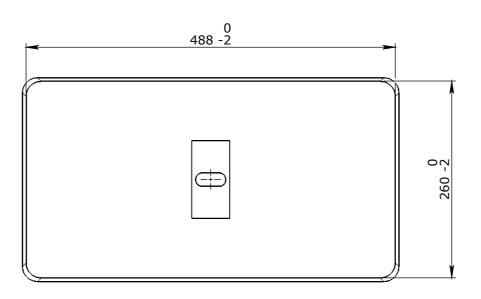

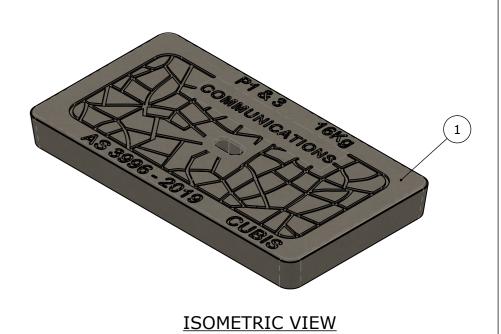

PLAN VIEW

BOTTOM VIEW

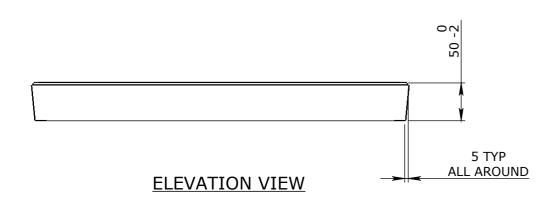

ISSUED FOR CONSTRUCTION

TOLI	ERANCE NOTES:	3					CHK / APPR:		HEAD OFFICE: CARNGHAM ROAD	DRAFTED DATE:	PROJECT:			
1.	CONCRETE TOLERANCES TO BE	2					CA		BALLARAT, VIC 3351		CUBIS SYSTEMS CATALOGUE			
	INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES						DATE:		(03) 5335 8741	DRAFTED BY: YJ SHAN	CONCRETE COVER			
2.	WHEN A BROOME FINISH IS REQUIRED	1					13/08/2019 RPEO DOCUMENT #:		(***)		P1 & 3 COMMUNICATIONS			
	THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE	Rev DESCRIPTION	[DATE	BY	APPROVED	RPEQ DOCUMENT #:	CLIBIC	ENGINEERING & DEVELOPMENT: 2 STRADBROKE STREET	13/08/2019	TI & J COMMONICATIONS			
3.	WALL THICKNESS - DIMENSION AS	GENERAL TOLERANCES REVISION O			√ CONTROL		八		HEATHWOOD, QLD 4110	LAST SAVED BY:	P1 & 3 COMMUNICATIONS COVE	D	REV	
	NOTED IS MINIMUM THICKNESS ONLY CONCRETE GRADE - 40MPA UNLESS	NOMINAL:		FLAT	TNESS: (NOT INCLUI	DING BROOME FINISH)	WEIGHT:	SYSTEMS —	(07) 3714 0444	ChanakaA	<u> </u>	^		
4.	NOTED OTHERWISE	UP TO 1000mm	1M AND ABOVE				MATERIAL: 15.86Kg	STOTEINIS	` '	⊕ €=	DRAWING No:			
5.	DIMENSIONS ARE NOT INCLUSIVE OF	TOLERANCE:	1mm IN 200mm UP	±41	mm PER 1		CONCRETE 40MPa	THE INFORMATION DISCLOSED IN TH	IIS DOCUMENT IS CONFIDENTIAL AND IS	DRAWN TO AS 1100	50201420	ICUEET.	SCALE UNO:	
(6.	SEALANTS OF JOINTS SURFACE FINISH - CLASS 4 (AS3610.1)	±5mm	A MAXIMUM OF 20m		IN 1M LE	NGTH		COPIED, REPRODUCED, OR GIVEN TO	ANY OTHER PARTY IN ANY FORM AND PATENTS VEST IN CUBIS SYSTEMS AUS.	DO NOT SCALE FROM SHEET	PAGE: 1/1	A3	1:5	