
TOL ±1.0

±2.0

±5.0

- CONCRETE NOTE:
 1. REFER TO GENERAL TOLERANCES UNO
 2. GRADE OF CONCRETE 40MPA
 3. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPA AT THE TIME OF LIFTING

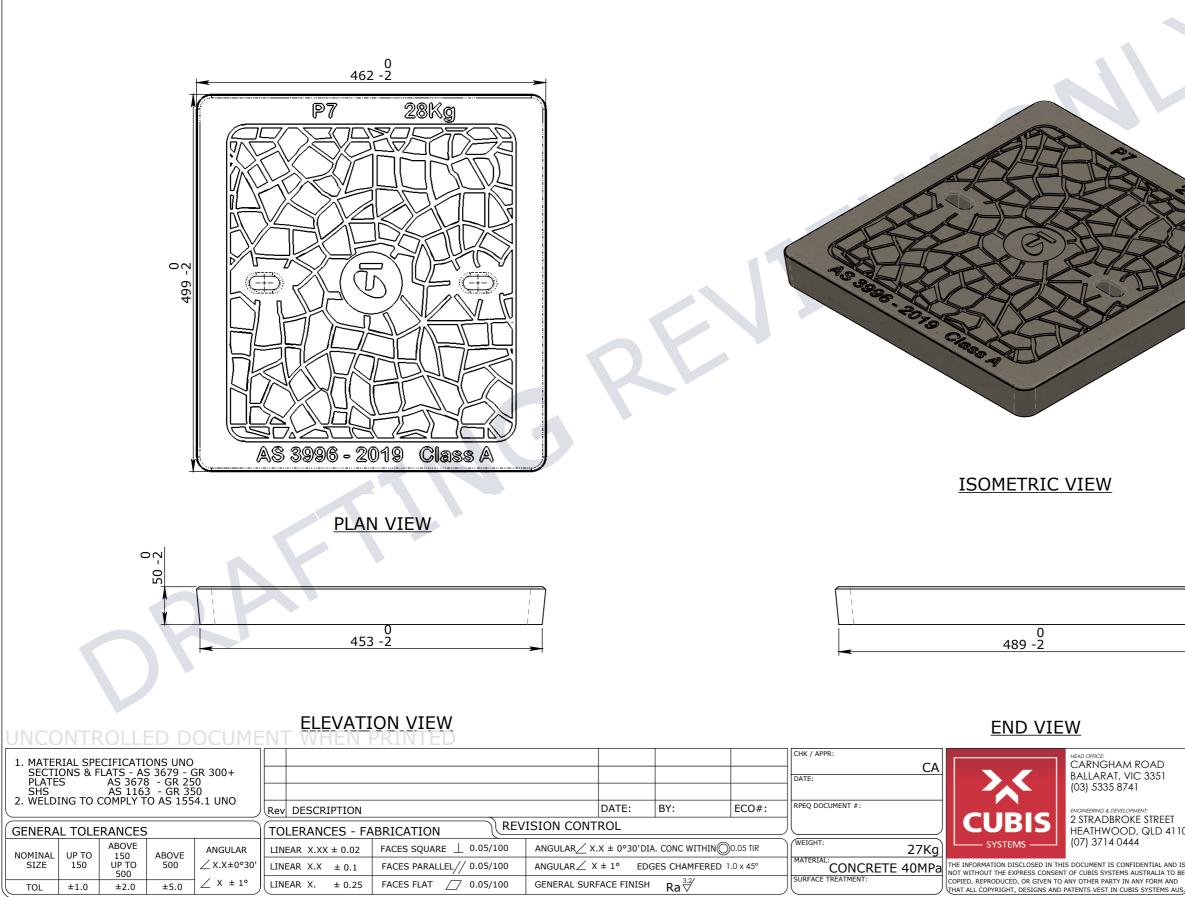

Ra ∛

	PROJECT DESCRIPTION: CUBIS SYSTEMS AUSTRALIA CATALOGUE PRODUCTS		
10	AX S [™] P7 COVER CONCRETE TELSTRA CLASS A	A	
IS	DRAWN TO AS 1100 DO NOT SCALE FROM SHEET 50201424	REV:	
se s.	SHEET: PAGE: SCALE UNO: DRAFTED DATE: DRAFTED BY: A3 1/1 1:5 20/04/2020 DRAFTED BY:		



