

- CONCRETE NOTE:


 1. REFER TO GENERAL TOLERANCES UNO
- GRADE OF CONCRETE 40MPA
- 3. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPA AT THE TIME OF LIFTING

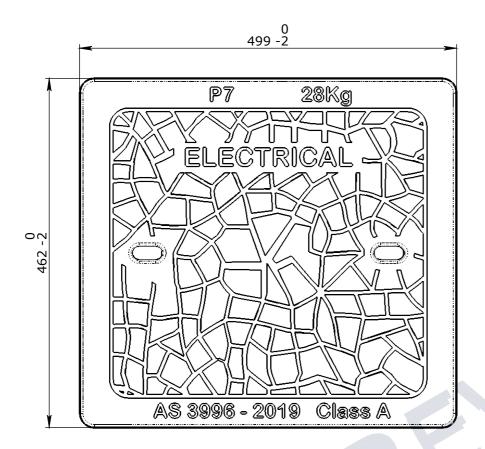

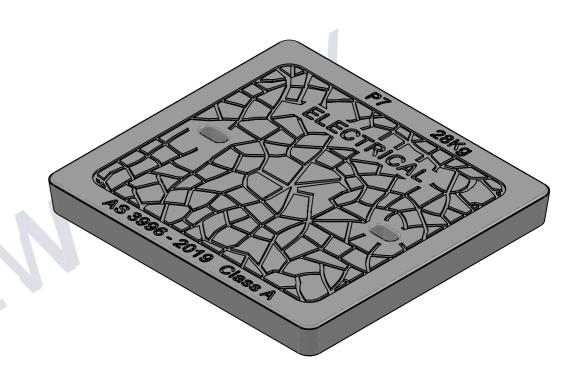


PLAN VIEW

ISOMETRIC VIEW

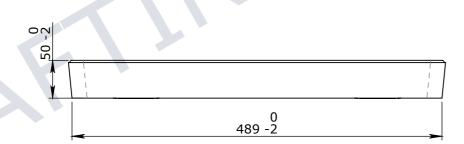

ELEVATION VIEW

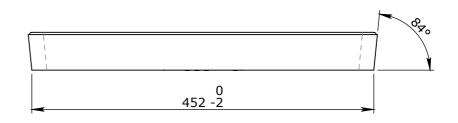

END VIEW

TOLERANCE:

±5mm

TOLERANCE NOTES:

1. CONCRETE TOLERANCES TO BE INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES

2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE

3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY

4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE

5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS

6. SURFACE FINISH - CLASS 4 (AS3610.1)

3									CHK / APPR:
									chanaka
2									Abeysingh
1									e
Rev.	DESCR	IPTION			DATE		BY	APPROVED	RPEQ DOCUMENT
GENERAL TOLERANCES REVISION CONTROL									
NOM	MINAL:		,			FLATN	SS: (NOT INCLUDING BROOME FINISH)		WEIGHT:
		UP TO 1000mm	1M AND	ABOVE					

1mm IN 200mm UP TO A MAXIMUM OF 20mm

PEQ DOCUMENT #: MATERIAL ±4mm PER 1M WIDTH CONCRETE 40MPA IN 1M LENGTH



28Kg

CARNGHAM ROAD BALLARAT, VIC 3351 (03) 5335 8741

2 STRADBROKE STREET HEATHWOOD, QLD 4110 (07) 3714 0444

THE INFORMATION DISCLOSED IN THIS DOCUMENT IS CONFIDENTIAL AND IS NOT WITHOUT THE EXPRESS CONSENT OF CUBIS SYSTEMS AUSTRALIA TO BE COPIED, REPRODUCED, OR GIVEN TO ANY OTHER PARTY IN ANY FORM AND THAT ALL COPYRIGHT, DESIGNS AND PATENTS VEST IN CUBIS SYSTEMS AUS.

1	DRAFTED DATE:	PART/F
	20/04/2020	502
l	DRAFTED BY:	REINFO
	P.GONCALVES	
l	DATE LAST SAVED:	CLIEN
l	28/10/2021	CUE
ı	LAST SAVED BY:	PROJE
1	NBRADIC	AX

201427 ORCEMENT COMPUTATION

BIS SYSTEMS CATALOGUE

S™ P7 COVER CONCRETE ELECTRICAL CLASS A

ITEM TYPE

⊕ = ∃ CONCRETE COVER P7 ELECTRICAL CLASS A SHEET SIZE | SCALE 50201427 1 / 1 | Α3