

CONCRETE NOTE:

- REFER TO GENERAL TOLERANCES UNO
- GRADE OF CONCRETE 40MPa
- MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPa AT THE TIME OF LIFTING




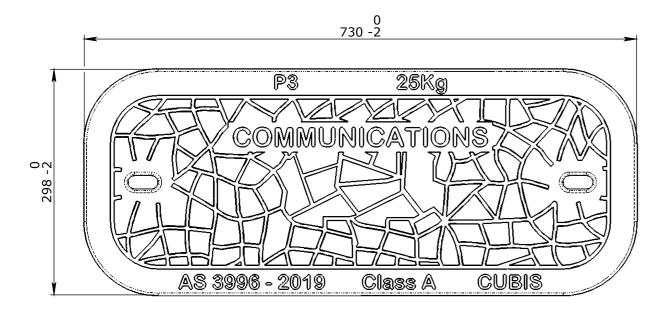

PLAN VIEW

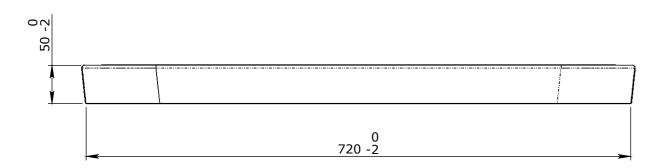

ELEVATION VIEW

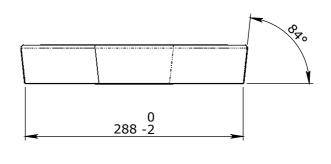

END VIEW

TOLERANCE NOTES:

1. CONCRETE TOLERANCES TO BE INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES

2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE


3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY

4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE

5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS

6. SURFACE FINISH - CLASS 4 (AS3610.1)

Rev	DESCR	IPTION		DATE:		BY:	ECO#:		
GENERAL TOLERANCES REVISION CONTROL									
NON	MINAL:	UP TO 1000mm	1M AND ABOVE	ı	FLATNESS: (NOT INCLUDING BROOME FINISH)		-		
TOL	ERANCE:	±5mm	1mm IN 200mm UP TO A MAXIMUM OF 20mm			±4mm PER 1M WIDTH IN 1M LENGTH			

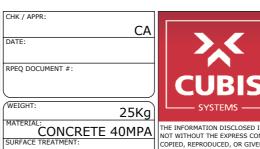

CHK / APPR:

HEAD OFFICE: CARNGHAM ROAD BALLARAT, VIC 3351 (03) 5335 8741

2 STRADBROKE STREET HEATHWOOD, QLD 4110 (07) 3714 0444

THE INFORMATION DISCLOSED IN THIS DOCUMENT IS CONFIDENTIAL AND IS NOT WITHOUT THE EXPRESS CONSENT OF CUBIS SYSTEMS AUSTRALIA TO BE COPIED, REPRODUCED, OR GIVEN TO ANY OTHER PARTY IN ANY FORM AND THAT ALL COPYRIGHT, DESIGNS AND PATENTS VEST IN CUBIS SYSTEMS AUS.

CUBIS SYSTEMS AUSTRALIA

CATALOGUE PRODUCTS

AX S™ P3 COVER CONCRETE COMMUNICATIONS CLASS A

DRAWN TO AS 1100 DO NOT SCALE FROM SHEET				WING No: 1201434		REV:)	D
HEET:	PAGE:	SCALE UNO:		DRAFTED DATE:	DRAFTED BY:	I .	J I	
Α3	1/1	1:5		17/09/2019				