

## **CONCRETE NOTE:**

- REFER TO GENERAL TOLERANCES UNO
- GRADE OF CONCRETE 40MPa
- MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPa AT THE TIME OF LIFTING

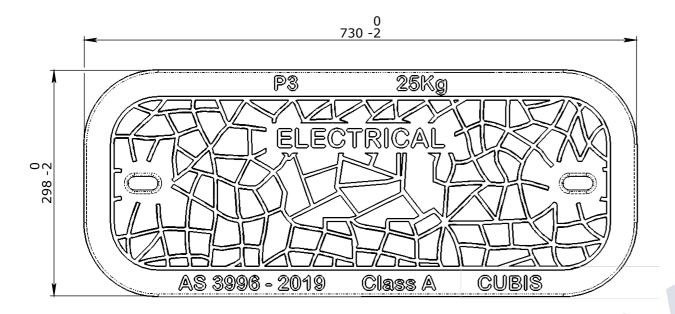


**PLAN VIEW** 

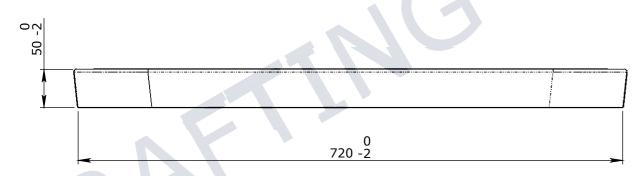

**ELEVATION VIEW** 



ISOMETRIC VIEW

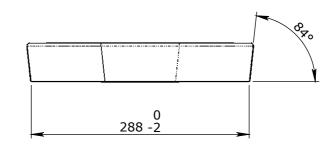

**END VIEW** 

TOLERANCE NOTES:

1. CONCRETE TOLERANCES TO BE INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES

2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE


3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY

4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE

5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS

6. SURFACE FINISH - CLASS 4 (AS3610.1)

										╝
Rev	Rev DESCRIPTION						BY:		ECO#:	╝
GENERAL TOLERANCES REVISION CONTROL								ال		
NOM:	NOMINAL: UP TO 1000mm		1M AND ABOVE			FLATNESS: (NOT IN				
TOLE	RANCE:	±5mm	1mm IN 200mm UP TO A MAXIMUM OF 20mm			±4mm PER 1M WIDTH IN 1M LENGTH				



CARNGHAM ROAD BALLARAT, VIC 3351 (03) 5335 8741

2 STRADBROKE STREET HEATHWOOD, QLD 4110 (07) 3714 0444

THE INFORMATION DISCLOSED IN THIS DOCUMENT IS CONFIDENTIAL AND IS NOT WITHOUT THE EXPRESS CONSENT OF CUBIS SYSTEMS AUSTRALIA TO BE COPIED, REPRODUCED, OR GIVEN TO ANY OTHER PARTY IN ANY FORM AND THAT ALL COPYRIGHT, DESIGNS AND PATENTS VEST IN CUBIS SYSTEMS AUS

## CUBIS SYSTEMS AUSTRALIA

CATALOGUE PRODUCTS

AX S™ P3 COVER CONCRETE ELECTRICAL CLASS A

							Ш
DRAWN TO AS 1100			DRA	WING No:		REV:	11
DO NOT SCALE FROM SHEET			50	201437		$\Lambda D$	
SHEET:	PAGE:	SCALE UNO:		DRAFTED DATE:	DRAFTED BY:	UD	
L A3	1/1	1:5		17/09/2019			]]