


- CONCRETE NOTE:
 1. REFER TO GENERAL TOLERANCES UNO
 2. GRADE OF CONCRETE 40MPa
 3. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPa AT THE TIME OF LIFTING

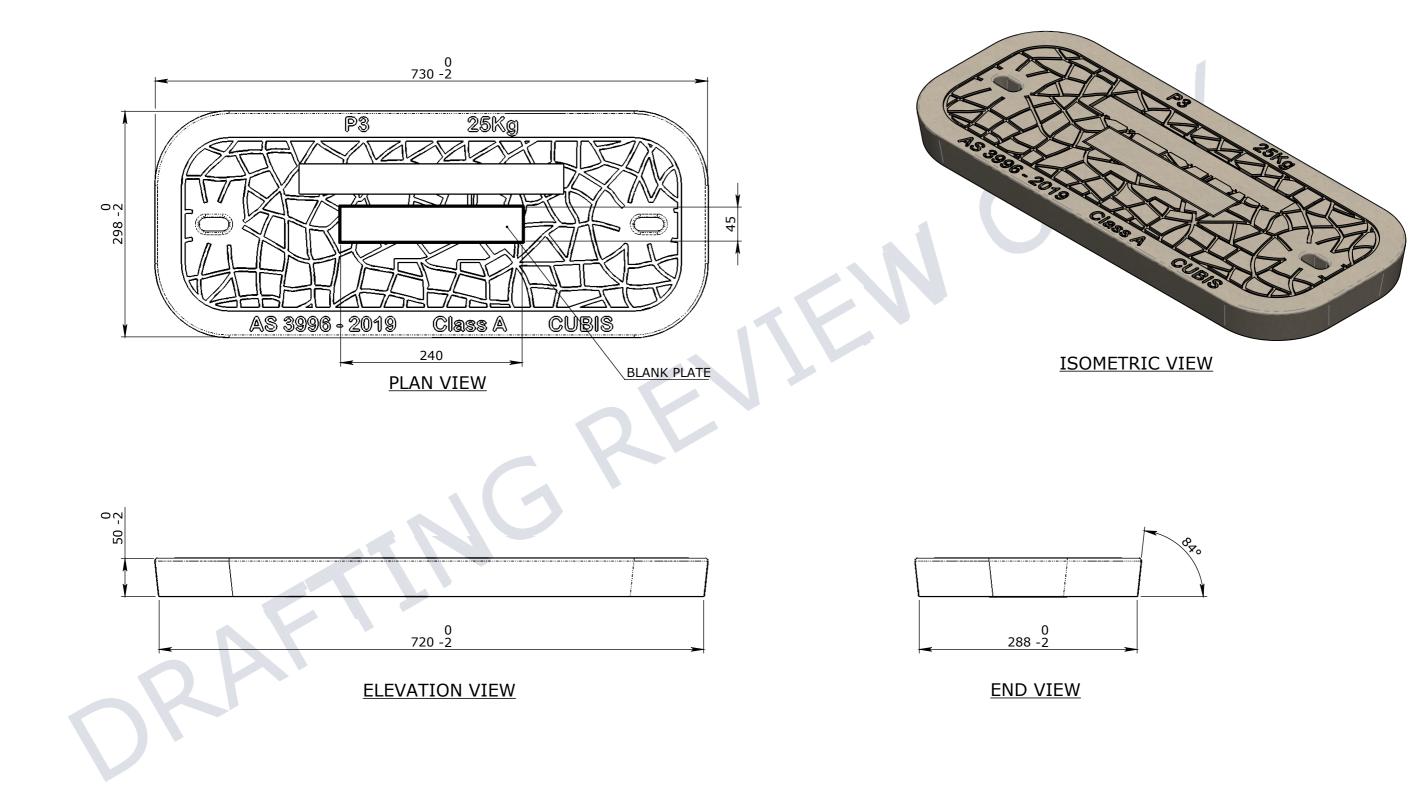

UNCONTROLLED DOCUMENT WHEN PRINTED

UNCONTROLLED DOCUTIE												
TOLERANCE NOTES:								CHK / APPR:		HEAD OFFICE:	PROJECT DES	
1. CONCRETE TOLERANCES TO BE								- .		CARNGHAM ROAD	CUBI	IS SY
INCONJUCTION / ACCORDANCE WITH								DATE:		BALLARAT, VIC 3351	11	
AS3600 - CONCRETE STRUCTURES								1		(03) 5335 8741		ALOG
2. WHEN A BROOME FINISH IS REQUIRED											DRAWING NA	
THE GENERAL TOLERANCE SUPERCEEDS	Rev DESCF	RIPTION		1	DATE:	BY:	ECO#:	RPEQ DOCUMENT #:		ENGINEERING & DEVELOPMENT:	AX S™	
THE FLATNESS TOLERANCE										2 STRADBROKE STREET		F3 CC
3. WALL THICKNESS - DIMENSION AS	GENERAL TOLERANCES				ROL			八		HEATHWOOD, QLD 4110		
NOTED IS MINIMUM THICKNESS ONLY	NOMINAL:	TOLERANCES	· · · · · · · · · · · · · · · · · · ·		5. 474	1500		WEIGHT:		(07) 3714 0444	11	
4. CONCRETE GRADE - 40MPA UNLESS	NOMINAL:	UP TO 1000mm	1M A	ND ABOVE	FLAIN	ESS: (NOT INCLUDING I	BROOME FINISH)	25 x	Kall SYSTEMS —	(07) 3714 0444	6-	DRAWN
NOTED OTHERWISE		00 10 10000000	1014	ND ADOVE				MATERIAL:		_	(+)+ -	DRAWN 1 DO NO FROM
5. DIMENSIONS ARE NOT INCLUSIVE OF	TOLERANCE:		1mm IN 200m		<u>тм</u> ±4	Imm PER 1	1 WIDTH	CONCRETE 40M		THIS DOCUMENT IS CONFIDENTIAL AND IS ENT OF CUBIS SYSTEMS AUSTRALIA TO BE		
SEALANTS OF JOINTS		±5mm		m UP TO A MAXIMU	וייו	IN 1M LEN	IGTH	SURFACE TREATMENT:		TO ANY OTHER PARTY IN ANY FORM AND	SHEET:	PAGE:
(6. SURFACE FINISH - CLASS 4 (AS3610.1)	Д	511111	0	F 20mm				八		ND PATENTS VEST IN CUBIS SYSTEMS AUS.	八 A3	1/1

	CUBIS SYSTEMS AUSTRALIA CATALOGUE PRODUCTS										
	DRAWING NAME: AX S™ P3 COVER CONCRETE PLAIN CLASS A										
10											
IS	DRAWN TO AS 1100 DO NOT SCALE FROM SHEET 50201438		REV:								
BE	SHEET: PAGE: SCALE UNO: DRAFTED DATE: DRAFTED BY: A3 1/1 1:5 17/09/2019 DRAFTED BY:		ΤD)							