


5.


- 1. REFER TO GENERAL TOLERANCES UNO
- 2. ALL LIFTING POINTS TO BE USED WHEN LIFTING
- 3. MINIMUM STRENGTH OF CONCRETE SHALL BE
- 25MPA AT THE TIME OF LIFTING
- 4. NOMINAL COVER TO REINFORCEMENT 35MM
- REFER TO ANCON LIFTING ARRANGEMENT PLAN 5.
- 6. BOX CULVERTS COMPLIES TO AS1597.2-2013



±5mm

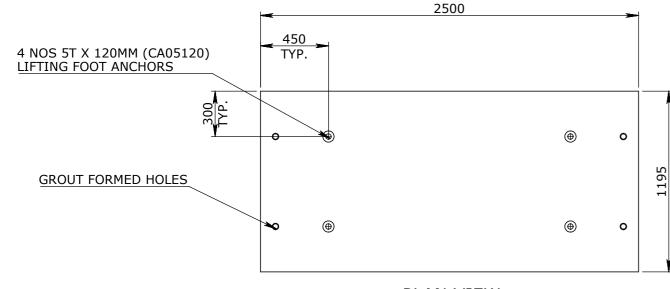



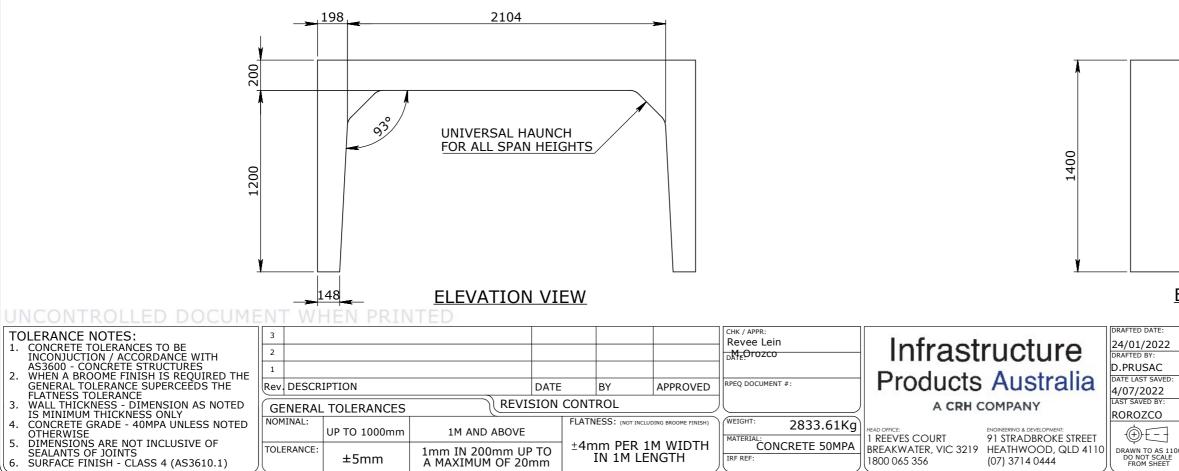

TO ANY OTHER PARTY IN ANY FORM AND THAT ALL CO NS AND PATENTS VEST IN INFRASTRUCTURE TO BE COPIED.RE

IRF REF

1800 065 356

(07) 3714 0444

IN 1M LENGTH

ISOMETRIC VIEW

END VIEW

	PART/PRODUCT #	Q	ίποη	E #	0	ORDER #	
	TMR CULVERT						
	REINFORCEMENT COMPUTATION	P	IT #		1	ITEM TYPE	
		5	502	207186		вох (CULVERTS
	CLIENT						
	CUBIS SYSTEMS						
	PROJECT DESC						
	BOX CULVERTS						
	DRAWING NAME REV.						
	BOX CULVERT TMR 2100x1200-2A 1200mm NOMINAL LENGTH						
00	DRAWING #	PAGE		SHEET SIZE	SCALE		
	50207186	1/	1	A3	1:	25	
PRODUCTS AUSTRALIA.							