

CULVERT NOTES:

- 1. REFER TO GENERAL TOLERANCES UNO
- 2. ALL LIFTING POINTS TO BE USED WHEN LIFTING
- 3. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPA AT THE TIME OF LIFTING
- 4. NOMINAL COVER TO REINFORCEMENT 35MM
- REFER TO ANCON LIFTING ARRANGEMENT PLAN
- 6. BOX CULVERTS COMPLIES TO AS1597.2-2013



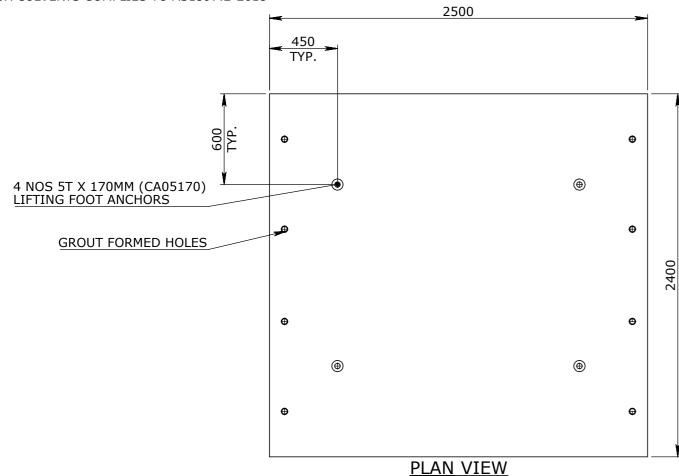

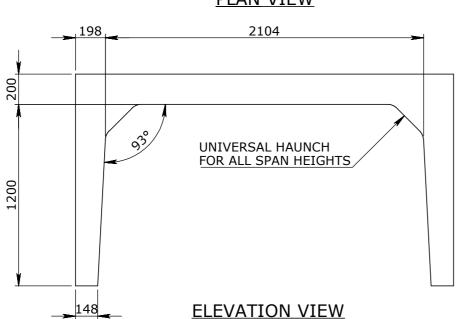

ISOMETRIC VIEW



END VIEW

TOLERANCE NOTES:

1. CONCRETE TOLERANCES TO BE INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES

2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE

3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY

4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE

OTHERWISE
DIMENSIONS ARE NOT INCLUSIVE OF
SEALANTS OF JOINTS
SURFACE FINISH - CLASS 4 (AS3610.1)

TOLERANCE:

CHK / APPR: Revee Lein DATE Orozco Rev. DESCRIPTION RPEQ DOCUMENT #: APPROVED DATE BY REVISION CONTROL **GENERAL TOLERANCES** FLATNESS: (NOT INCLUDING BROOME FINISH) NOMINAL: UP TO 1000mm 1M AND ABOVE

1mm IN 200mm UP TO A MAXIMUM OF 20mm

Infrastructure Products Australia A CRH COMPANY 5690.78Kg

1 REEVES COURT CONCRETE 50MPA BREAKWATER, VIC 3219 HEATHWOOD, QLD 4110

ENGINEERING & DEVELOPMENT:
91 STRADBROKE STREET

AFTED DATE:	PART/PRODUCT #	QUOTE #	ORDER #
1/01/2022	TMR CULVERT		
AFTED BY:	REINFORCEMENT COMPUTATION	PIT #	ITEM TYPE
PRUSAC		50207187	BOX CULVERT
TE LAST SAVED:	CLIENT	·	•
07/2022	CUBIS SYSTEMS		
ST SAVED BY:	PROJECT DESC		
OROZCO	BOX CULVERTS		

Α3

BOX CULVERT TMR 2100x1200-2A 2400mm NOMINAL LENGTH

50207187

±4mm PER 1M WIDTH

IN 1M LENGTH