

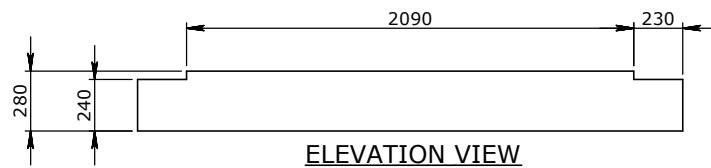


**CULVERT BASE SLAB NOTES:**

1. REFER TO GENERAL TOLERANCES UNO
2. ALL LIFTING POINTS TO BE USED WHEN LIFTING
3. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPA AT THE TIME OF LIFTING
4. NOMINAL COVER TO REINFORCEMENT - 35MM
5. REFER TO ANCON LIFTING ARRANGEMENT PLAN
6. BOX CULVERTS COMPLIES TO AS1597.2-2013

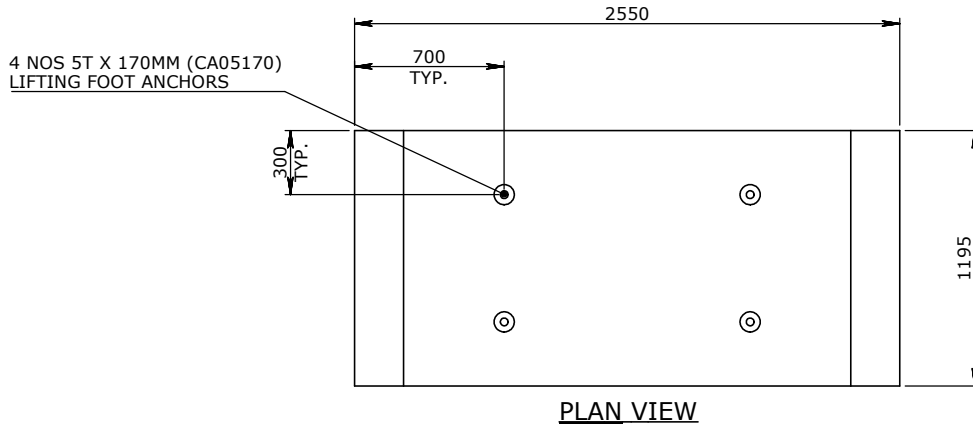

UNCONTROLLED DOCUMENT WHEN PRINTED

**TOLERANCE NOTES:**

1. CONCRETE TOLERANCES TO BE INCONJUNCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES
2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE
3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY
4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE
5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS
6. SURFACE FINISH - CLASS 4 (AS3610.1)

Rev.	DESCRIPTION	DATE	BY	APPROVED
3				
2				
1				

GENERAL TOLERANCES		REVISION CONTROL	
NOMINAL:	UP TO 1000mm	1M AND ABOVE	FLATNESS: (NOT INCLUDING BROOME FINISH)
TOLERANCE:	±5mm	1mm IN 200mm UP TO A MAXIMUM OF 20mm	±4mm PER 1M WIDTH IN 1M LENGTH

CHK / APPR:	
DATE:	
RPEQ DOCUMENT #:	
WEIGHT:	2035.09Kg
MATERIAL:	CONCRETE 50MPA
TRF REF:	

**Infrastructure Products Australia**  
A CRH COMPANY

HEAD OFFICE: 1 REEVES COURT, BREAKWATER, VIC 3219 1800 065 356  
ENGINEERING & DEVELOPMENT: 91 STRADBROKE STREET, HEATHWOOD, QLD 4110 (07) 3714 0444

DRAFTED DATE:	24/01/2022	PART/PRODUCT #	TMR BASE SLABS	QUOTE #		ORDER #	
DRAFTED BY:	DPRUSAC	REINFORCEMENT COMPUTATION		PIT #	50207220	ITEM TYPE	RCBC BASE
DATE LAST SAVED:	29/04/2022	CLIENT	CUBIS SYSTEMS	PROJECT DESC	RCBC BASE	DRAWING NAME	BASE SLAB TMR 2100-2A 1200mm NOMINAL LENGTH
LAST SAVED BY:	ROROZCO	DRAWING #	50207220	PAGE	1 / 1	SHEET SIZE	A3
DRAWN TO AS 1100 DO NOT SCALE FROM SHEET		SCALE	1:25	REV.	<b>B</b>		