


CULVERT BASE SLAB NOTES:


1. REFER TO GENERAL TOLERANCES UNO
2. ALL LIFTING POINTS TO BE USED WHEN LIFTING
3. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPA AT THE TIME OF LIFTING
4. NOMINAL COVER TO REINFORCEMENT - 35MM
5. REFER TO ANCON LIFTING ARRANGEMENT PLAN
6. BOX CULVERTS COMPLIES TO AS1597.2-2013




PLAN VIEW

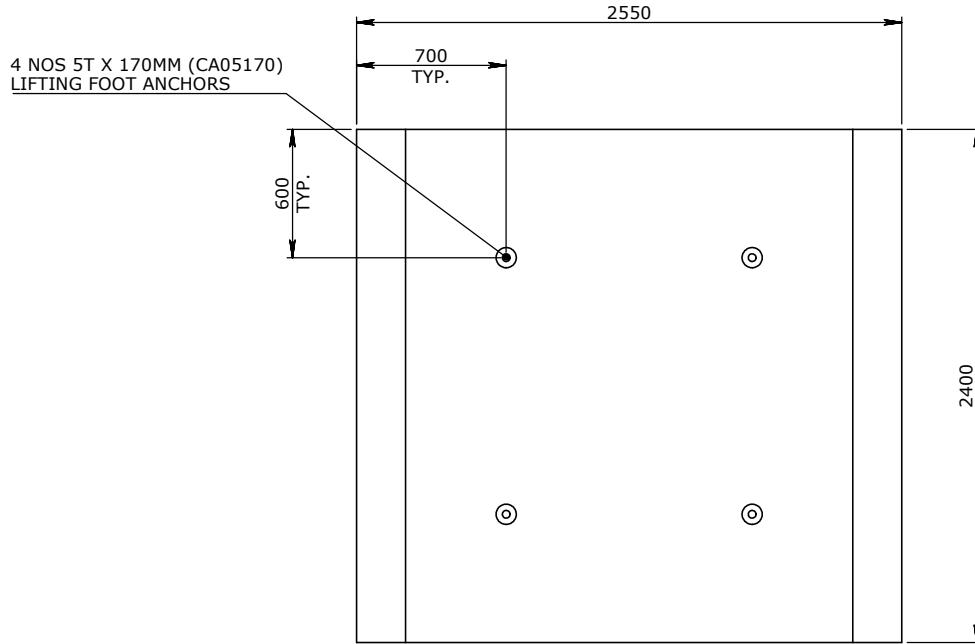

ISOMETRIC VIEW

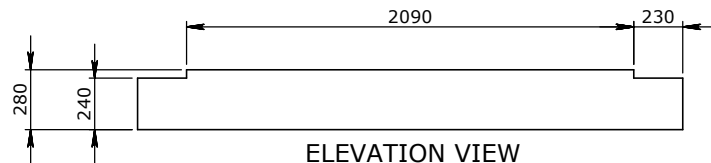

ELEVATION VIEW

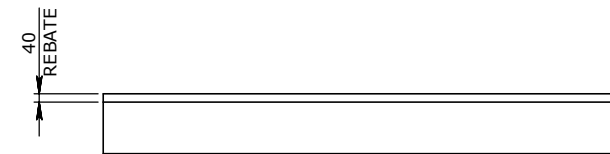

END VIEW

UNCONTROLLED DOCUMENT WHEN PRINTED

TOLERANCE NOTES:

1. CONCRETE TOLERANCES TO BE IN CONJUNCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES
2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE
3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY
4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE
5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS
6. SURFACE FINISH - CLASS 4 (AS3610.1)

3									
2									
1									
Rev.	DESCRIPTION	DATE	BY	APPROVED	REVISION CONTROL				
GENERAL TOLERANCES					FLATNESS: (NOT INCLUDING BROOME FINISH)				
NOMINAL:	UP TO 1000mm	1M AND ABOVE				±4mm PER 1M WIDTH IN 1M LENGTH			
TOLERANCE:	±5mm	1mm IN 200mm UP TO A MAXIMUM OF 20mm							

CHK / APPR:	
DATE:	
RPEQ DOCUMENT #:	
WEIGHT:	4088.68Kg
MATERIAL:	CONCRETE 50MPA
TRF REF:	

Infrastructure Products Australia
A CRH COMPANY

HEAD OFFICE: 1 REEVES COURT, BREAKWATER, VIC 3219, 1800 065 356
ENGINEERING & DEVELOPMENT: 91 STRADBROKE STREET, HEATHWOOD, QLD 4110, (07) 3714 0444

DRAFTED DATE:	24/01/2022	PART/PRODUCT #	TMR BASE SLABS	QUOTE #		ORDER #	
DRAFTED BY:	DPRUSAC	REINFORCEMENT COMPUTATION		PIT #	50207221	ITEM TYPE	RCBC BASE
DATE LAST SAVED:	29/04/2022	CLIENT	CUBIS SYSTEMS	PROJECT DESC			
LAST SAVED BY:	ROROZCO	RCBC BASE	DRAWING NAME				
DRAWN TO AS 1100 DO NOT SCALE FROM SHEET			BASE SLAB TMR 2100-2A 2400mm NOMINAL LENGTH				
DRAWING #	50207221	PAGE	1 / 1	SHEET SIZE	A3	SCALE	1:25
							REV. B