


**CULVERT BASE SLAB NOTES:**


1. REFER TO GENERAL TOLERANCES UNO
2. ALL LIFTING POINTS TO BE USED WHEN LIFTING
3. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPA AT THE TIME OF LIFTING
4. NOMINAL COVER TO REINFORCEMENT - 35MM
5. REFER TO ANCON LIFTING ARRANGEMENT PLAN
6. BOX CULVERTS COMPLIES TO AS1597.2-2013




**PLAN VIEW**

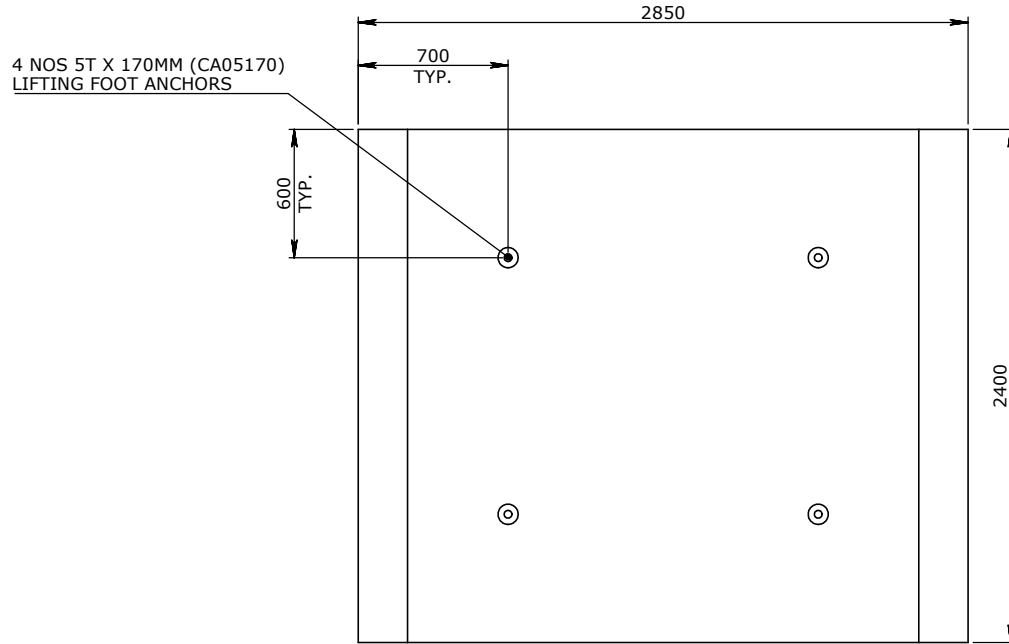

**ISOMETRIC VIEW**



**ELEVATION VIEW**

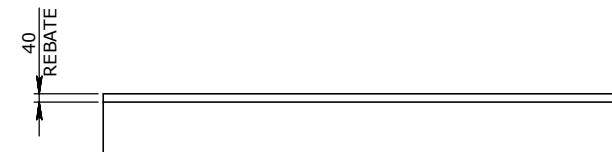

**END VIEW**

UNCONTROLLED DOCUMENT WHEN PRINTED

- TOLERANCE NOTES:**
1. CONCRETE TOLERANCES TO BE IN CONJUNCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES
  2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE
  3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY
  4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE
  5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS
  6. SURFACE FINISH - CLASS 4 (AS3610.1)

3									
2									
1									
Rev.	DESCRIPTION	DATE	BY	APPROVED	REVISION CONTROL				
<b>GENERAL TOLERANCES</b>					<b>FLATNESS: (NOT INCLUDING BROOME FINISH)</b>				
NOMINAL:	UP TO 1000mm	1M AND ABOVE	±4mm PER 1M WIDTH IN 1M LENGTH						
TOLERANCE:	±5mm	1mm IN 200mm UP TO A MAXIMUM OF 20mm							
CHK / APPR:									
DATE:									
RPEQ DOCUMENT #:									
WEIGHT:	4582.54Kg								
MATERIAL:	CONCRETE 50MPA								
TRF REF:									

**Infrastructure Products Australia**  
A CRH COMPANY

HEAD OFFICE: 1 REEVES COURT, BREAKWATER, VIC 3219, 1800 065 356  
ENGINEERING & DEVELOPMENT: 91 STRADBROKE STREET, HEATHWOOD, QLD 4110, (07) 3714 0444

DRAFTED DATE:	24/01/2022	PART/PRODUCT #	TMR BASE SLABS	QUOTE #		ORDER #	
DRAFTED BY:	DPRUSAC	REINFORCEMENT COMPUTATION		PIT #	50207223	ITEM TYPE	RCBC BASE
DATE LAST SAVED:	29/04/2022	CLIENT	CUBIS SYSTEMS				
LAST SAVED BY:	ROROZCO	PROJECT DESC	RCBC BASE				
DRAWING NAME		BASE SLAB TMR 2400-2A 2400mm NOMINAL LENGTH					
DRAWING #	50207223	PAGE	1 / 1	SHEET SIZE	A3	SCALE	1:25
							REV. <b>B</b>