

- CONCRETE NOTE:

 1. REFER TO GENERAL TOLERANCES UNO
 2. GRADE OF CONCRETE 40MPa
- MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPa AT THE TIME OF LIFTING

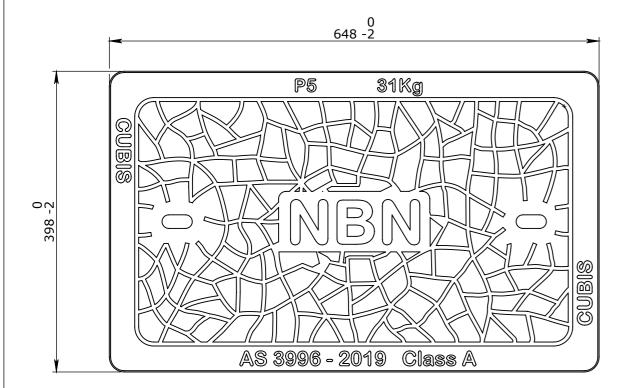

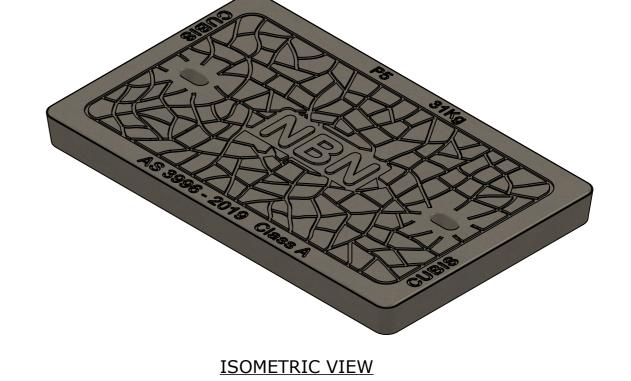



20

PLAN VIEW

ELEVATION VIEW

638 -Ž

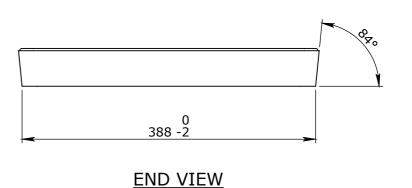

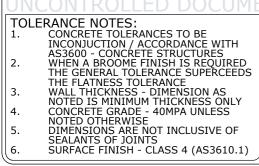

_ I N	NI WILL FRINILD									
Rev	Rev DESCRIPTION						BY:	ECO#:		
GE	GENERAL TOLERANCES REVISION CONT						ROL			
NO	MINAL:	UP TO 1000mm	1M AND ABOVE			FLATNESS: (NOT INCLUDING BROOME FINISH)				
TOL	LERANCE:	±5mm	1mm IN 200mm UP TO A MAXIM OF 20mm		UM	±4mm PER 1M WIDTH IN 1M LENGTH				



CHK / APPR:

RPEQ DOCUMENT #:

HEAD OFFICE: CARNGHAM ROAD BALLARAT, VIC 3351 (03) 5335 8741

2 STRADBROKE STREET HEATHWOOD, QLD 4110 (07) 3714 0444

THE INFORMATION DISCLOSED IN THIS DOCUMENT IS CONFIDENTIAL AND IS NOT WITHOUT THE EXPRESS CONSENT OF CUBIS SYSTEMS AUSTRALIA TO BE COPIED, REPRODUCED, OR GIVEN TO ANY OTHER PARTY IN ANY FORM AND THAT ALL COPYRIGHT, DESIGNS AND PATENTS VEST IN CUBIS SYSTEMS AUS

CUBIS SYSTEMS AUSTRALIA CATALOGUE PRODUCTS

AX S™ P5 COVER CONCRETE NBN CLASS A

$\Rightarrow -$	→ DRAWN TO		DRAWING No:					
\$\frac{1}{2}	DO NOT		50201077					
EET:	PAGE:	SCALE UN	0:	DRAFTED DATE:	DRAFTED BY:			
Α3	1/1	1:5		29/09/2017	P.ADAMS			