



- CONCRETE NOTE:1. REFER TO GENERAL TOLERANCES UNO2. GRADE OF CONCRETE 40MPa3. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPa AT THE TIME OF LIFTING

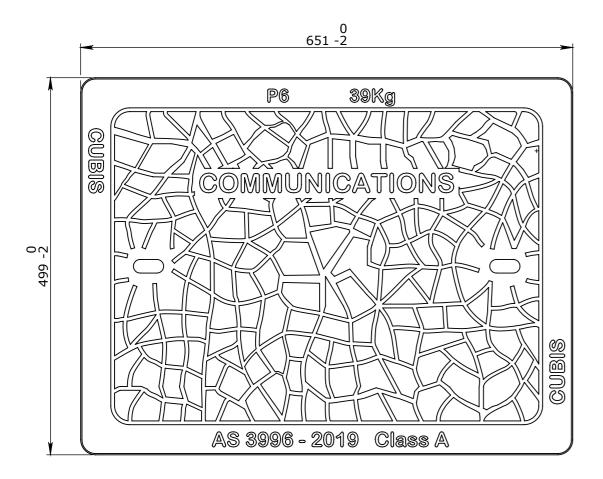

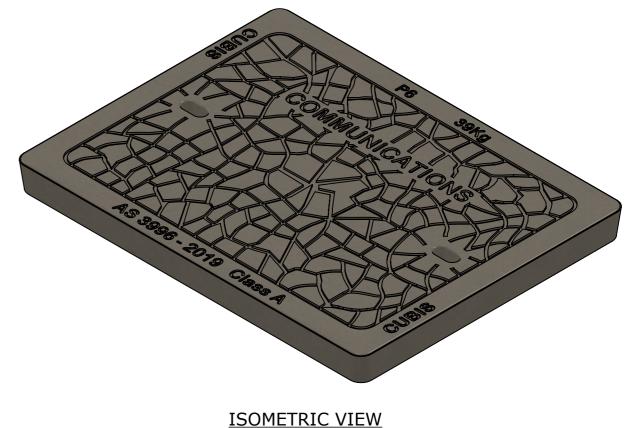

PLAN VIEW

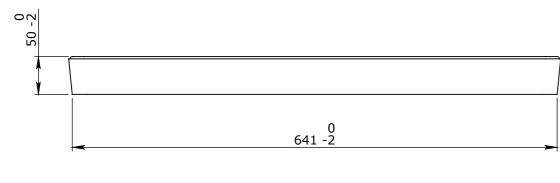

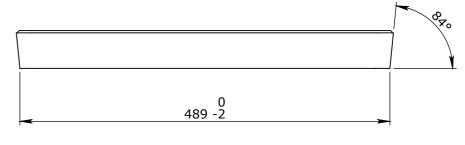

ELEVATION VIEW



UNCONTROLLED DOCUMENT WHEN PRINTED

	MCONTROLLED DOCUM					-					
	OLERANCE NOTES: CONCRETE TOLERANCES TO BE								CHK / APPR:		HEAD OFFICE: CARNGHAM ROAD
-	INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES								DATE:		BALLARAT, VIC 3351 (03) 5335 8741
2	THE GENERAL TOLERANCE SUPERCEEDS	Rev DESC	RIPTION			DATE:	BY:	ECO#:	RPEQ DOCUMENT #:		ENGINEERING & DEVELOPMENT:
3	THE FLATNESS TOLERANCE WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY	GENERAL TOLERANCES			REVISION CONTROL				jl		2 STRADBROKE STREET HEATHWOOD, QLD 411
4	CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE	NOMINAL:	UP TO 1000mm	1M /	AND ABOVE	FLA	TNESS: (NOT INCLU	JDING BROOME FINISH)	WEIGHT: 39Kg	SYSTEMS	(07) 3714 0444
5	5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS	TOLERANCE:		1mm IN 200m	nm UP TO A MAXIM	UM ±		1M WIDTH	CONCRETE 40MPA	THE INFORMATION DISCLOSED IN TH NOT WITHOUT THE EXPRESS CONSE	IS DOCUMENT IS CONFIDENTIAL AND NT OF CUBIS SYSTEMS AUSTRALIA TO E
(6	S. SURFACE FINISH - CLASS 4 (AS3610.1)		±5mm	0	OF 20mm			ENGTH	SURFACE TREATMENT:	COPIED, REPRODUCED, OR GIVEN TO	D ANY OTHER PARTY IN ANY FORM AND D PATENTS VEST IN CUBIS SYSTEMS AU

٦				10	ALICTD	ΛΙΤΛ					
	CUBIS SYSTEMS AUSTRALIA CATALOGUE PRODUCTS										
	DRAWING NAME: AX STM P6 COVER CONCRETE COMMS CLASS A										
10											
IS	DRAWN TO AS 1100 DO NOT SCALE FROM SHEET				WING No:)201173	REV:					
BE IS.	SHEET: A3	PAGE: 1/1	scale UN 1:5	0:	DRAFTED DATE: 29/09/2017	DRAFTED BY:					