


- CONCRETE NOTE:
 1. REFER TO GENERAL TOLERANCES UNO
 2. GRADE OF CONCRETE 40MPa
 3. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPa AT THE TIME OF LIFTING

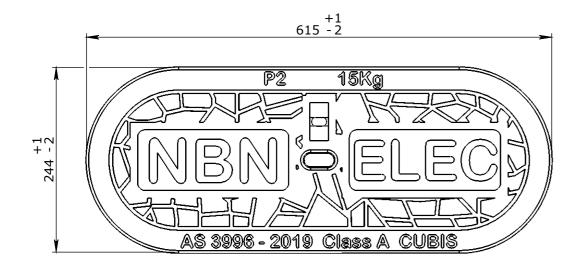


PLAN VIEW

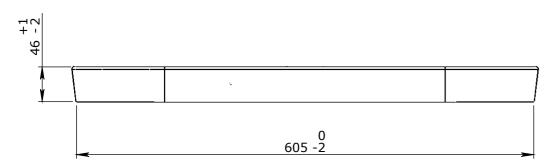

ELEVATION VIEW



END VIEW



TO 1. 2.	LERANCE NOTES: CONCRETE TOLERANCES TO BE INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES WHEN A BROOME FINISH IS REQUIRED		VVII						CHK / APPR: DATE:		BALLARAT, VIC 3351	PROJECT DESCRIPTION: CUBIS SYSTEMS AUSTRALIA CATALOGUE PRODUCTS DRAWING NAME:		
3.	WALL THICKNESS TOLERANCE WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY	GEN	ev DESCRIPTION GENERAL TOLERANCES OMINAL:				-			WEIGHT:		ENGINEERING & DEVELOPMENT: 2 STRADBROKE STREET HEATHWOOD, QLD 4110 (07) 3714 0444	AX S [™] P2 COVER CONCRETE NBN ELEC CLASS A	
4. 5. 6.	CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS SURFACE FINISH - CLASS 4 (AS3610.1)			UP TO 1000mm ±5mm	1M AND 1mm IN 200mm I OF 2	-		FLATNESS: (NOT INCLUDING BROOME FINISH) ±4mm PER 1M WIDTH IN 1M LENGTH		MATERIAL: CONCRETE 40MPA	A THE INFORMATION DISCLOSED IN TH NOT WITHOUT THE EXPRESS CONSENCE COPIED, REPRODUCED, OR GIVEN TO	SYSTEMS (07) 3714 0444 E INFORMATION DISCLOSED IN THIS DOCUMENT IS CONFIDENTIAL AND IS DT WITHOUT THE EXPRESS CONSENT OF CUBIS SYSTEMS AUSTRALIA TO BE OPIED, REPRODUCED, OR GIVEN TO ANY OTHER PARTY IN ANY FORM AND TAL ALL COPURIENT. DESIGNS AND PARTY IN CUBIS SYSTEMS AUST		

ISOMETRIC VIEW



