


- CONCRETE NOTE:

 1. REFER TO GENERAL TOLERANCES UNO
 2. GRADE OF CONCRETE 40MPa
 3. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPa AT THE TIME OF LIFTING

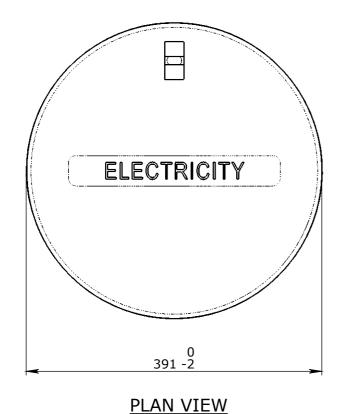

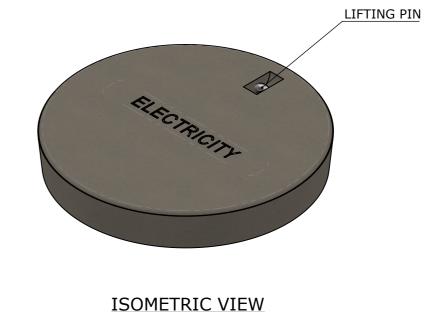

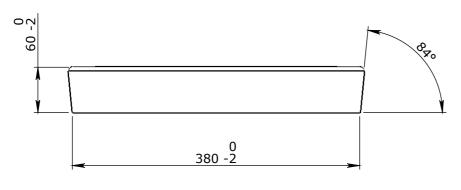

ELEVATION VIEW

TOLERANCE NOTES:						
1.	CONCRETE TOLERANCES TO BE					
	INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES					
2.	WHEN A BROOME FINISH IS REQUIRED					
	THE GENERAL TOLERANCE SUPERCEEDS					
	THE FLATNESS TOLERANCE					
3.						
	NOTED IS MINIMUM THICKNESS ONLY					
4.	CONCRETE GRADE - 40MPA UNLESS					
3. 4.	WALL THICKNESS - DIMENSION AS					

NOTED OTHERWISE
DIMENSIONS ARE NOT INCLUSIVE OF
SEALANTS OF JOINTS
SURFACE FINISH - CLASS 4 (AS3610.1)

3								CHK / APPR:
2								DATE:
1								
Rev	v DESCRIPTION			DATE		BY	APPROVED	RPEQ DOCUMENT #:
GE	GENERAL TOLERANCES REVISION CONTROL							
NOMINAL:		UP TO 1000mm	1M AND ABOVE			TNESS: (NOT INCLUDING BROOME FINISH)		WEIGHT: 17Kg
TOLERANCE:		±5mm	1mm IN 200mm UP A MAXIMUM OF 20r		±4mm PER 1M WIDTH IN 1M LENGTH			CONCRETE 40MPa



HEAD OFFICE: CARNGHAM ROAD BALLARAT, VIC 3351 (03) 5335 8741

2 STRADBROKE STREET HEATHWOOD, QLD 4110 (07) 3714 0444

THE INFORMATION DISCLOSED IN THIS DOCUMENT IS CONFIDENTIAL AND IS NOT WITHOUT THE EXPRESS CONSENT OF CUBIS SYSTEMS AUSTRALIA TO BE COPIED, REPRODUCED, OR GIVEN TO ANY OTHER PARTY IN ANY FORM AND THAT ALL COPYRIGHT, DESIGNS AND PATENTS VEST IN CUBIS SYSTEMS AUS.

DRAFTED DATE:	PROJECT:
27/09/2019	CUBIS SYS
DRAFTED BY:	CONCRETE
YJ SHAN	CONCRETE
DATE LAST SAVED:	DIA 390 EL
23/10/2019	
LAST SAVED BY:	NAME:

yshan

STEMS CATALOGUE COVER LECTRICAL

, ,	NAME			REV			
	COVER CONCRETE ELECTRICAL DIA 390mm						
	DRAWING No:			Δ			
	521045						
100	PROJECT / CATALOGUE CODE:	PAGE:	SHEET:	SCALE UNO:			
	521045	1/1	A3	1:5			