
FABRICATION NOTE:

- 1. REFER TO TOLERANCES FABRICATION UNO
- 2. WELDS TO COMPLY WITH AS 1554-1
- 3. REMOVE ALL BURRS & SHARP EDGES
- 4. HOT DIP GALVANIZED AFTER FABRICATING **ACCORDING TO AS4680**

BOM:50201408 WEIGHT ITEM # **DESCRIPTION** PART # 50201408 AX S™ COVER GMS TO SUIT 1500X1500 OPENING CLASS C 73.87

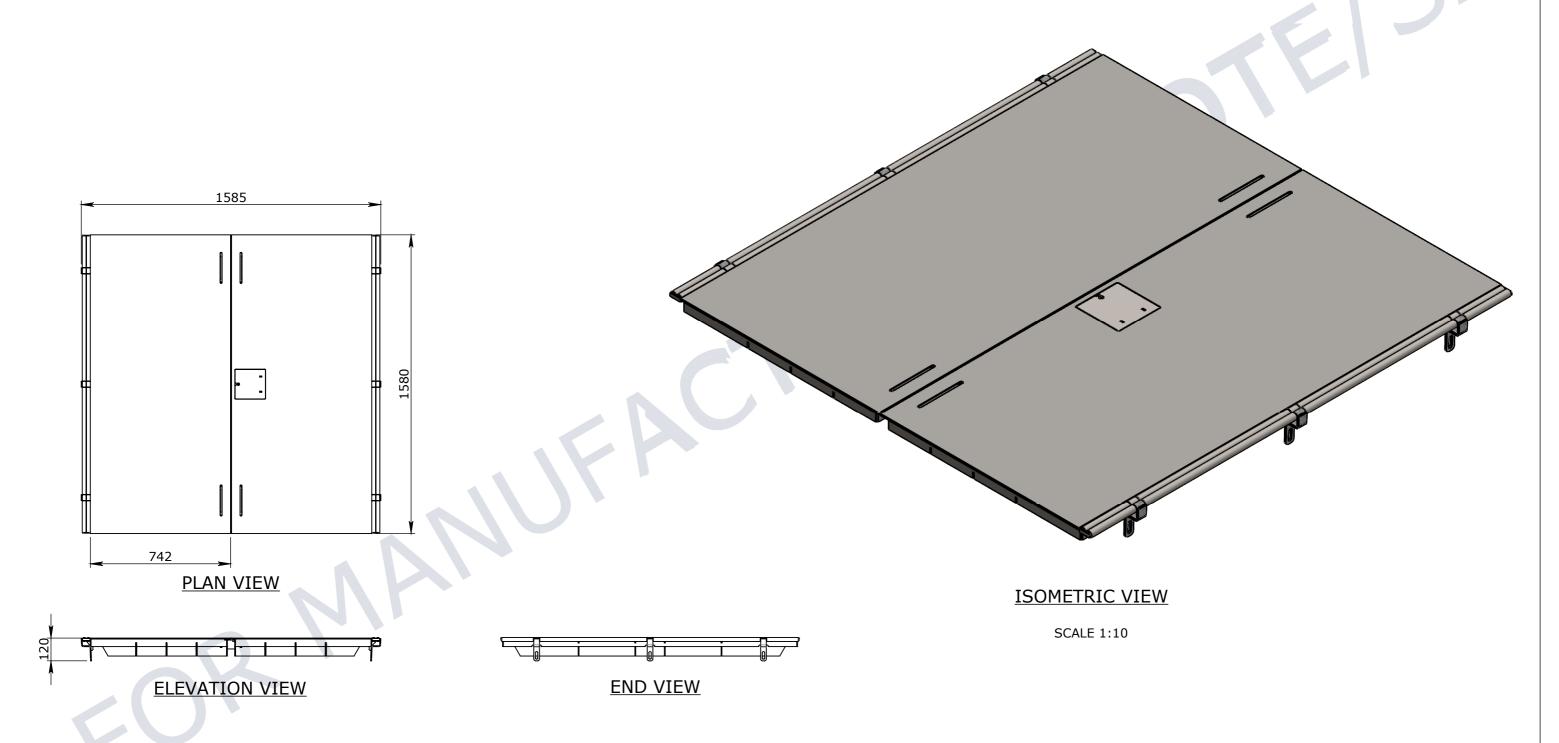

TOLERANCE:

TOLERANCE NOTES:

1. CONCRETE TOLERANCES TO BE
 INCONJUCTION / ACCORDANCE WITH
 AS3600 - CONCRETE STRUCTURES

2. WHEN A BROOM FINISH IS REQUIRED THE
 GENERAL TOLERANCE SUPERCEDES THE
 FLATNESS TOLERANCE

3. WALL THICKNESS - DIMENSION AS NOTED
 IS MINIMUM THICKNESS ONLY

4. CONCRETE GRADE - 40MPA UNLESS NOTED
 OTHERWISE 4. CUNCKETE GRADE - TOTAL OTTELLO TO THERWISE
5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS
6. SURFACE FINISH - CLASS 4 (AS3610.1)

2 Rev. DESCRIPTION DATE BY REVISION CONTROL **GENERAL TOLERANCES** 1M AND ABOVE UP TO 1000mm

1mm IN 200mm UP TO A MAXIMUM OF 20mm

AC RPEQ DOCUMENT #: APPROVED FLATNESS: (NOT INCLUDING BROOME FINISH) 167.66Kg MATERIAL ±4mm PER 1M WIDTH IN 1M LENGTH

Infrastructure Products Australia

A CRH COMPANY

91 STRADBROKE STREET 1 REEVES COURT BREAKWATER, VIC 3219 HEATHWOOD, QLD 4110 (07) 3714 0444

	DRAFTED DATE:	PART/PRODUCT #	QUO	ΓE #	ORDER #	
	19/08/2022	50201408				
	DRAFTED BY:	REINFORCEMENT COMPUTATION	PIT #		ITEM TYP	E
	DATE LAST SAVED: CLIENT					
	2/09/2022	CUBIS SYSTEMS/AUSPITS				
	LAST SAVED BY:	PROJECT DESC				
	CABEYSINGH	AX S™ COVER GMS TO SUIT 1500x1500 OPENING CLASS C				
	E	DRAWING NAME				REV.
1						
0	DRAWN TO AS 1100	DRAWING #	PAGE	SHEET SIZE	SCALE	1 ()
J	DO NOT SCALE FROM SHEET	50201408	1/1	A3	1:20	