


**CONCRETE PRODUCT NOTE:**


1. REFER TO GENERAL TOLERANCES UNO
2. GRADE OF CONCRETE - 40MPA
3. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPA AT THE TIME OF LIFTING

**WELDMENT CUT LIST**


ITEM NO.	QTY.	DESCRIPTION
1	1	P1 & 3 ELECTRICAL COVER
2	1	P1 & 3 CONCRETE COVER REO
3	1	LIFTING PLATE

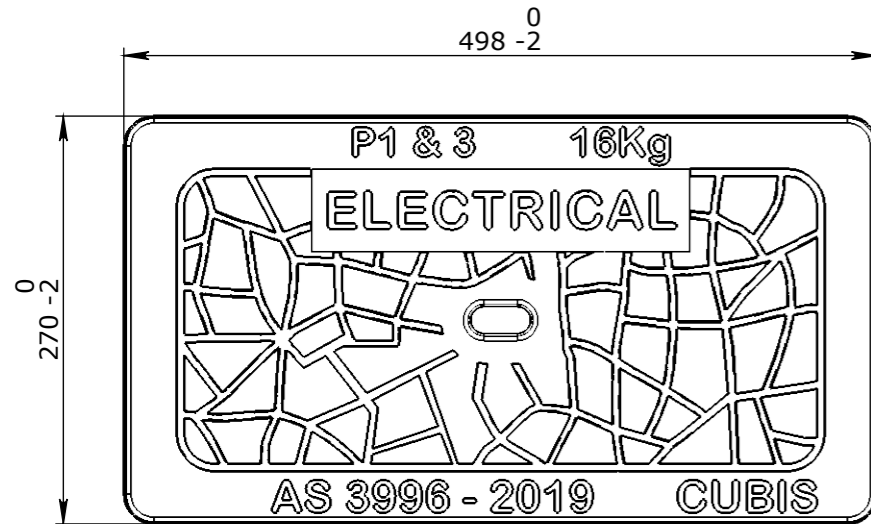


PLAN VIEW

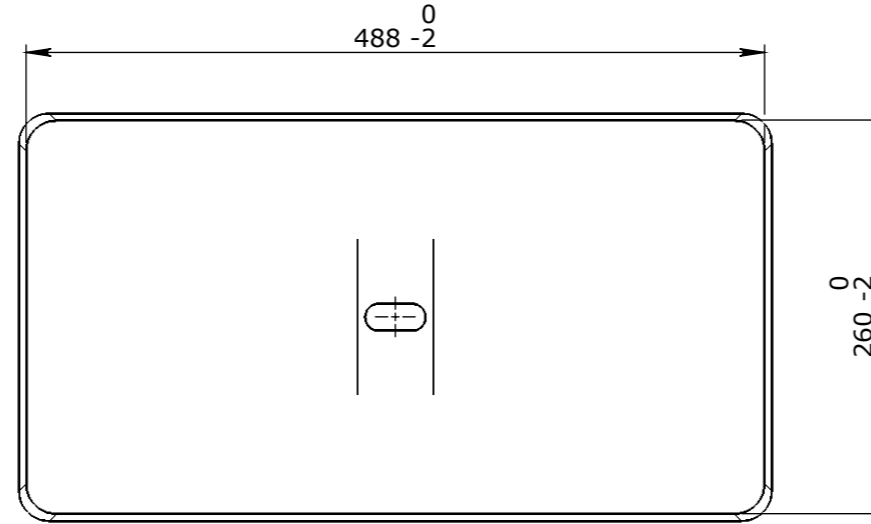

BOTTOM VIEW

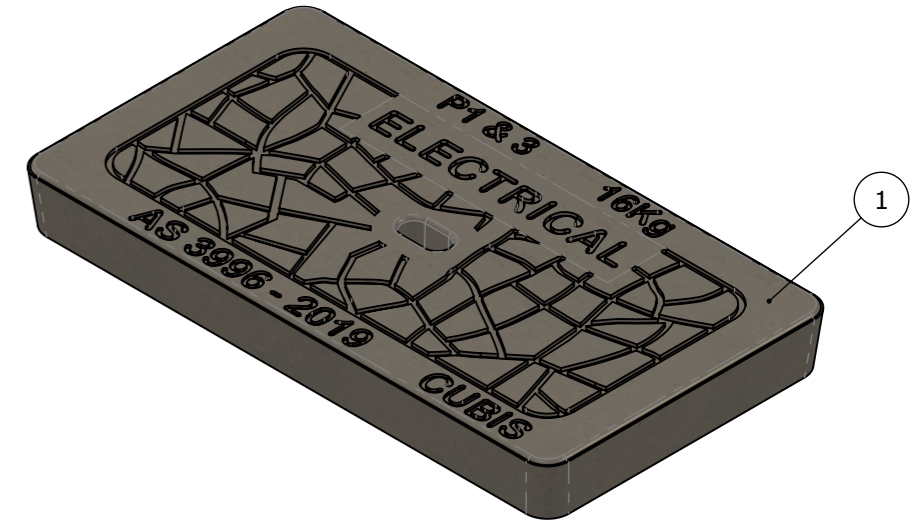

ISOMETRIC VIEW

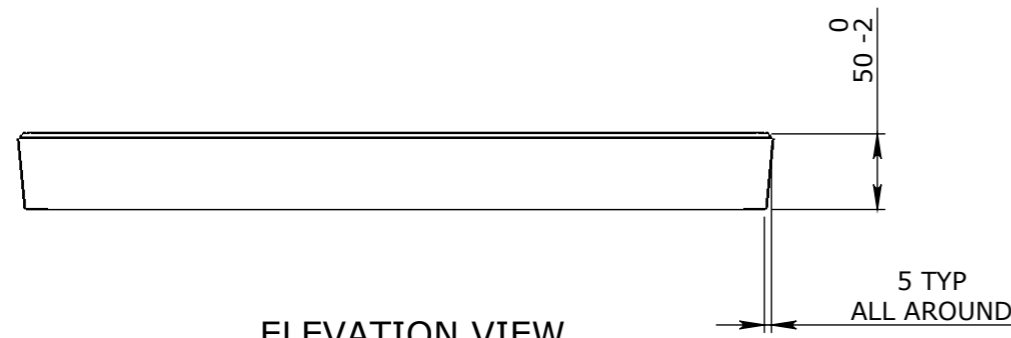

ELEVATION VIEW

**ISSUED FOR CONSTRUCTION**


**TOLERANCE NOTES:**

1. CONCRETE TOLERANCES TO BE INCONJUNCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES
2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE
3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY
4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE
5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS
6. SURFACE FINISH - CLASS 4 (AS3610.1)

Rev	DESCRIPTION	DATE	BY	APPROVED
3				
2				
1				

GENERAL TOLERANCES		REVISION CONTROL	
NOMINAL:	UP TO 1000mm	1M AND ABOVE	FLATNESS: (NOT INCLUDING BROOME FINISH)
TOLERANCE:	±5mm	1mm IN 200mm UP TO A MAXIMUM OF 20mm	±4mm PER 1M WIDTH IN 1M LENGTH

CHK / APPR:	CA
DATE:	13/08/2019
RPEQ DOCUMENT #:	
WEIGHT:	15.86Kg
MATERIAL:	CONCRETE 40MPa



HEAD OFFICE:  
CARNGHAM ROAD  
BALLARAT, VIC 3351  
(03) 5335 8741

ENGINEERING & DEVELOPMENT:  
2 STRADBROKE STREET  
HEATHWOOD, QLD 4110  
(07) 3714 0444

THE INFORMATION DISCLOSED IN THIS DOCUMENT IS CONFIDENTIAL AND IS NOT WITHOUT THE EXPRESS CONSENT OF CUBIS SYSTEMS AUSTRALIA TO BE COPIED, REPRODUCED, OR GIVEN TO ANY OTHER PARTY IN ANY FORM AND THAT ALL COPYRIGHT, DESIGNS AND PATENTS VEST IN CUBIS SYSTEMS AUS.

DRAFTED DATE:	13/08/2019
DRAFTED BY:	YJ SHAN
DATE LAST SAVED:	13/08/2019
LAST SAVED BY:	ChanakaA
DRAWN TO AS 1100	DO NOT SCALE FROM SHEET

PROJECT:	CUBIS SYSTEMS CATALOGUE		
	CONCRETE COVER		
	P1 & 3 ELECTRICAL		
NAME:	P1 & 3 ELECTRICAL COVER		REV
DRAWING No:	50201421		0
PROJECT / CATALOGUE CODE:	PAGE:	SHEET:	SCALE UNO:
50201421	1 / 1	A3	1:5