

CONCRETE NOTE:

- REFER TO GENERAL TOLERANCES UNO GRADE OF CONCRETE 40MPa MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPa AT THE TIME OF LIFTING




PLAN VIEW

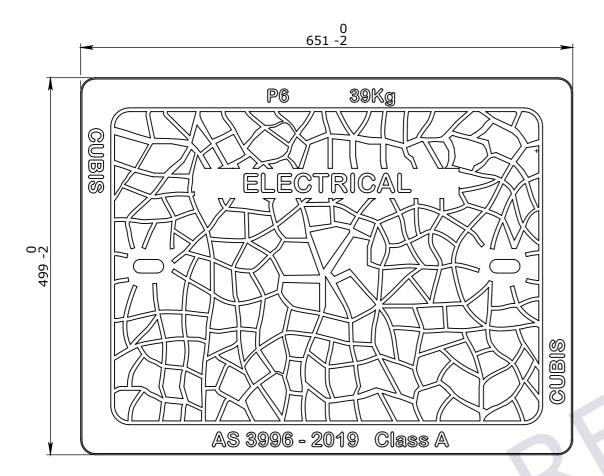

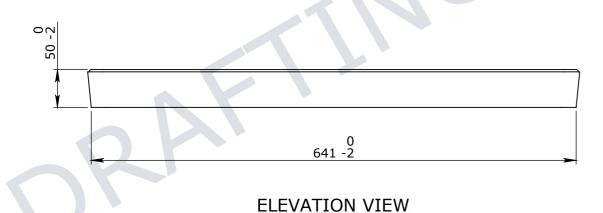

ISOMETRIC VIEW

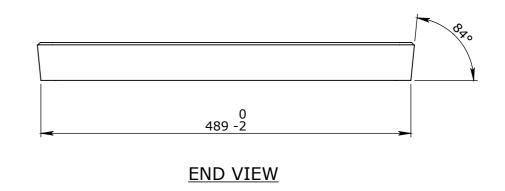

TOLERANCE NOTES:

1. CONCRETE TOLERANCES TO BE INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES

2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE

3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY

4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE

5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS

6. SURFACE FINISH - CLASS 4 (AS3610.1)

	ΝΙ	VVI	<u>HEN PRIN</u>	HED						
ı										
ľ	Rev	DESCR	IPTION		DATE:		BY:	ECO#:		
	GE	NERAL	TOLERANCES		REVISION CO	VISION CONTROL				
	NOM	IINAL:	UP TO 1000mm	1M AND ABOVE			FLATNESS: (NOT INCLUDING BROOME FINISH)			
	TOLI				nm UP TO A MAXIMUM DF 20mm		±4mm PER 1M WIDTH IN 1M LENGTH			
_										



HEAD OFFICE: CARNGHAM ROAD BALLARAT, VIC 3351 (03) 5335 8741

2 STRADBROKE STREET HEATHWOOD, QLD 4110 (07) 3714 0444

THE INFORMATION DISCLOSED IN THIS DOCUMENT IS CONFIDENTIAL AND IS NOT WITHOUT THE EXPRESS CONSENT OF CUBIS SYSTEMS AUSTRALIA TO BE COPIED, REPRODUCED, OR GIVEN TO ANY OTHER PARTY IN ANY FORM AND THAT ALL COPYRIGHT, DESIGNS AND PATENTS VEST IN CUBIS SYSTEMS AUS.

CUBIS SYSTEMS AUSTRALIA CATALOGUE PRODUCTS

AX S™ P6 COVER CONCRETE ELEC CLASS A

₩Ľ-	T DRAWN TO		DRAWING No:				REV:
FROM SHEET				201459			
SHEET:	PAGE:	SCALE UN	O:	DRAFTED DATE:	DRAFTED BY:		
_ A3	1/1	1:5		29/09/2017			