


**CONCRETE PRODUCT NOTE:**


1. REFER TO GENERAL TOLERANCES UNO
2. 40MPa FIBRE REINFORCED CONCRETE (FIBRECON MP47@5Kg/M<sup>3</sup>)
3. ALL LIFTING POINTS TO BE USED WHEN LIFTING
4. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPa AT THE TIME OF LIFTING
5. COVER TO REINFORCEMENT TO BE 50mm
6. REFER TO ANCON LIFTING ARRANGEMENT PLAN
7. CONCRETE VOLUME (M<sup>3</sup>) = [0.13]

**WELDMENT CUT LIST**


ITEM NO.	QTY.	DESCRIPTION	WEIGHT
1	1	M12X50 FERRULE	0
2	1	CAST PART	306
3	4	1.3TX65 LIFTING ANCHORS	0

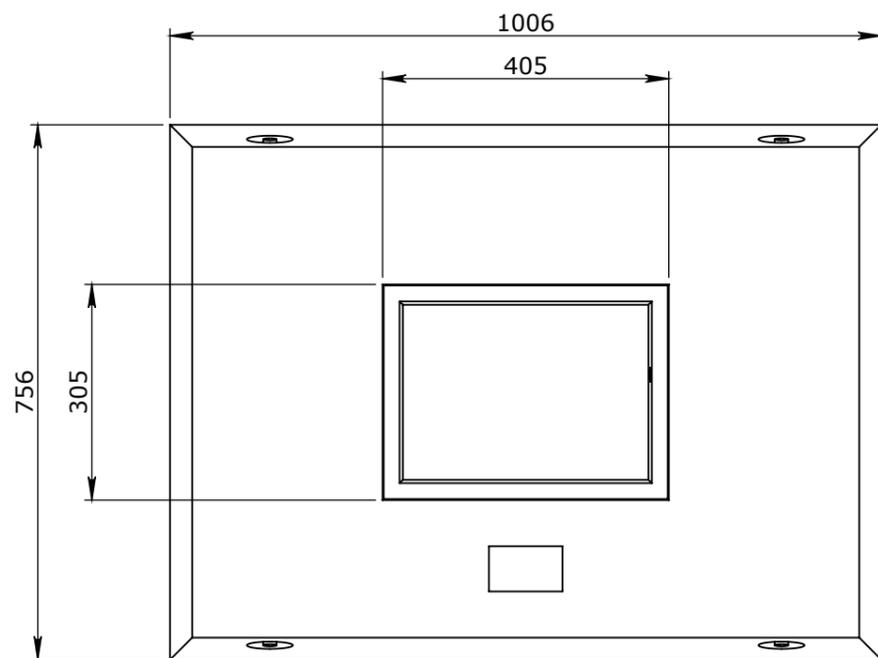


**PLAN VIEW**

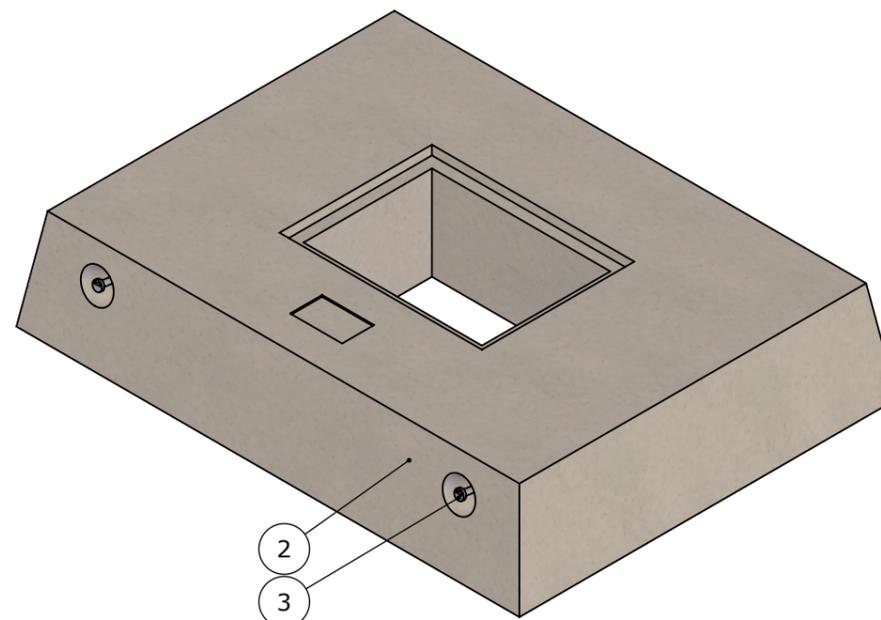


**ISOMETRIC VIEW**

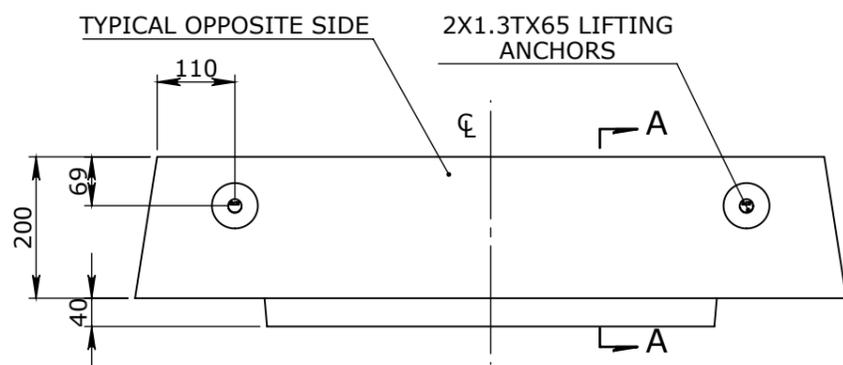

**ELEVATION VIEW**

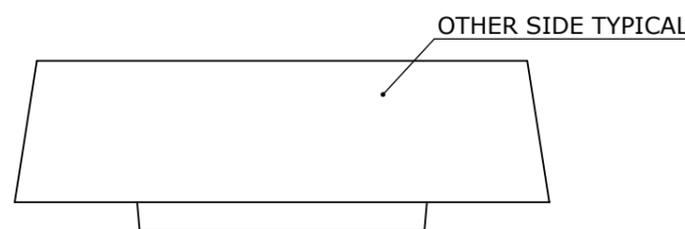

**END VIEW**

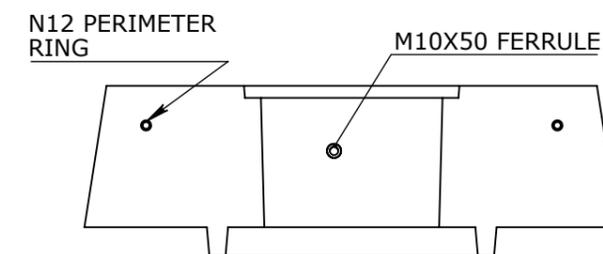

**SECTION A-A**

**ISSUED FOR CONSTRUCTION**

- TOLERANCE NOTES:**
1. CONCRETE TOLERANCES TO BE INCONJUNCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES
  2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE
  3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY
  4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE
  5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS
  6. SURFACE FINISH - CLASS 4 (AS3610.1)

Rev	DESCRIPTION	DATE	BY	APPROVED
3				
2				
1				

GENERAL TOLERANCES		REVISION CONTROL	
NOMINAL:	UP TO 1000mm	1M AND ABOVE	FLATNESS: (NOT INCLUDING BROOME FINISH)
TOLERANCE:	±5mm	1mm IN 200mm UP TO A MAXIMUM OF 20mm	±4mm PER 1M WIDTH IN 1M LENGTH

CHK / APPR:	CA
DATE:	17/08/2018
RPEQ DOCUMENT #:	
WEIGHT:	310Kg
MATERIAL:	



HEAD OFFICE:  
CARNHAM ROAD  
BALLARAT, VIC 3351  
(03) 5335 8741

ENGINEERING & DEVELOPMENT:  
2 STRADBROKE STREET  
HEATHWOOD, QLD 4110  
(07) 3714 0444

DRAFTED DATE:	14/08/2018
DRAFTED BY:	S.GAFFAR
DATE LAST SAVED:	17/08/2018
LAST SAVED BY:	ChanakaA
DRAWN TO AS 1100 DO NOT SCALE FROM SHEET	

PROJECT:	CUBIS SYSTEMS CATALOGUE CONCRETE PRODUCTION CONCRETE COLLARS		
NAME:	P5 PIT, COLLAR		
DRAWING No:	523166		
PROJECT / CATALOGUE CODE:	PAGE:	SHEET:	SCALE UNO:
523166	1 / 1	A3	1:10
REV	0		