

GENERAL NOTE:

- REFER TO GENERAL TOLERANCES UNO
 GRADE OF CONCRETE 40MPA (PRE-CAST COMPONENTS)
 ALL PRE-CAST LIFTING POINTS TO BE USED WHEN LIFTING
- 4. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPA AT THE TIME OF LIFTING (PRE-CAST COMPONENTS)
 5. REFER TO ANCON LIFTING ARRANGEMENT PLAN
- (PRE-CAST COMPONENTS)
- 6. FOUNDATION MATERIAL & PREPARATION PROCEEDURE REFER TO INSTALLATION GUIDE (ULTIMA CONNECT RANGE™)
 7. LADDER OR STEP IRONS CAN BE SUPPLIED AS PER
- CLIENT REQUIREMENT

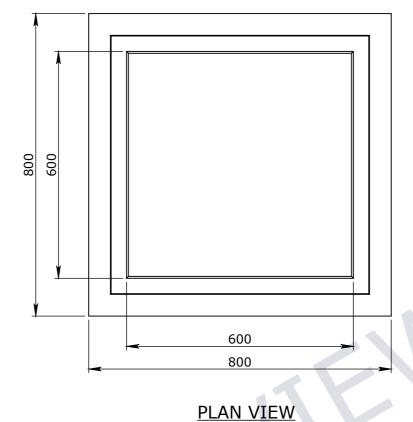

1.3T LIFTING ANCHORS 0

(25)

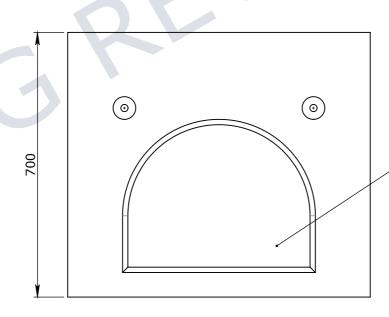

ISOMETRIC VIEW

480x370 CATHEDRAL KNOCK OUT TYPICAL ON ALL FACES

ELEVATION VIEW

END VIEW

TOLERANCE NOTES:

1. CONCRETE TOLERANCES TO BE INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES

2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE

3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY

4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE

5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS

6. SURFACE FINISH - CLASS 4 (AS3610.1)

Rev DESCRIPTION DATE: BY: ECO#: REVISION CONTROL GENERAL TOLERANCES
NOMINAL: FLATNESS: (NOT INCLUDING BROOME FINISH 1M AND ABOVE UP TO 1000mm ±4mm PER 1M WIDTH 1mm IN 200mm UP TO A MAXIMUM OF 20mm TOLERANCE: IN 1M LENGTH ±5mm

CHK / APPR RPEQ DOCUMENT #: 422.09Kg CONCRETE FIBRE 40MPa

CARNGHAM ROAD BALLARAT, VIC 3351 (03) 5335 8741

2 STRADBROKE STREET HEATHWOOD, QLD 411 (07) 3714 0444

THE INFORMATION DISCLOSED IN THIS DOCUMENT IS CONFIDENTIAL AND IS NOT WITHOUT THE EXPRESS CONSENT OF CUBIS SYSTEMS AUSTRALIA TO BE COPIED, REPRODUCED, OR GIVEN TO ANY OTHER PARTY IN ANY FORM AND THAT ALL COPYRIGHT, DESIGNS AND PATENTS VEST IN CUBIS SYSTEMS AUS

CUBIS SYSTEMS AUSTRALIA CATALOGUE PRODUCTS

PIT CONCRETE 600x600x600mm REBATE STORM WATER CLASS D

DRAWN TO AS 1100 DO NOT SCALE FROM SHEET			DRAWING No: 50201249			F
HEET:	PAGE:	SCALE UNO:		DRAFTED DATE:	DRAFTED BY:	
Α3	1/1	1:10)	22/01/2020	P.ADAMS	