**CONCRETE PRODUCT NOTE:** 

REFER TO GENERAL TOLERANCES UNO

REFER TO DRAWING 50201634-PRO REINFORCEMENT DESIGN


40MPA FIBER REINFORCED CONCRETE - FIBERCON 47 @ 5Kg/M3


ALL LIFTING POINTS TO BE USED WHEN LIFTING MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPA

AT THE TIME OF LIFTING


COVER TO REINFORCEMENT TO BE 50mm
REFER TO ANCON LIFTING ARRANGEMENT PLAN

CONCRETE VOLUME  $(M^3) = [0.27]$ 

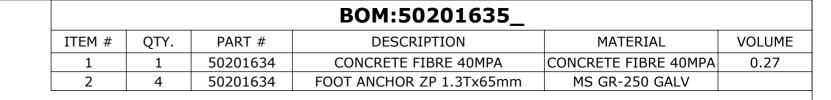


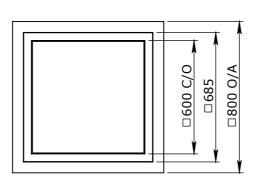



**PLAN VIEW** 

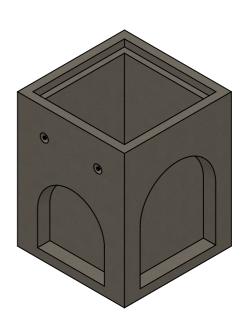

**ISOMETRIC VIEW** 

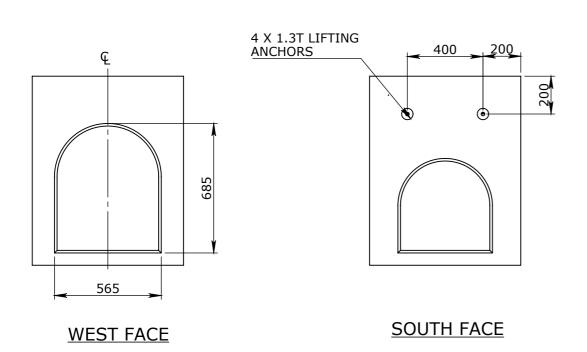

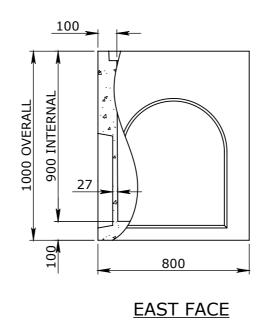

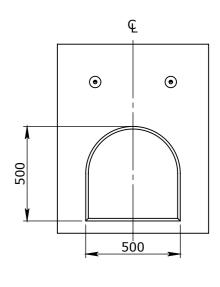

NORTH FACE

TOLERANCE NOTES:

1. CONCRETE TOLERANCES TO BE INCONJUCTION / ACCORDANCE WITH AS3600 - CONCRETE STRUCTURES

2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE FLATNESS TOLERANCE

3. WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY

4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE

5. DIMENSIONS ARE NOT INCLUSIVE OF SEALANTS OF JOINTS

6. SURFACE FINISH - CLASS 4 (AS3610.1)

2 Rev. DESCRIPTION DATE APPROVED BY REVISION CONTROL GENERAL TOLERANCES 1M AND ABOVE UP TO 1000mm ±4mm PER 1M WIDTH 1mm IN 200mm UP TO A MAXIMUM OF 20mm TOLERANCE: IN 1M LENGTH

CA 17/10/2018 PEQ DOCUMENT #: 563Kg CONCRETE 40MPA

Infrastructure Products Australia

A CRH COMPANY

ENGINEERING & DEVELOPMENT:
91 STRADBROKE STREET 1 REEVES COURT BREAKWATER, VIC 3219 HEATHWOOD, QLD 4110 1800 065 356

RAFTED DATE:	PART/PRODUCT # QUOTE #			ORDER #	ORDER #	
/03/2022	50201635					
RAFTED BY:	EINFORCEMENT COMPUTATION PIT #		ITEM TYPE			
ILEE						
ATE LAST SAVED:	CLIENT					
3/05/2022	CUBIS SYSTEMS CATALOGUE					
AST SAVED BY:	PROJECT DESC					
1LEE	STORMWATER RANGE					
⊕ = ∃	PIT CONCRETE 600X600X900X100MM REBATE STORM WATER CLASS D					
DRAWN TO AS 1100 DO NOT SCALE FROM SHEET	DRAWING #	PAGE	SHEET SIZE	SCALE		
	50201635	1/1	A3	1:20		