

## **GENERAL NOTES:**

- CONCRETE GRADE TO BE 50 MPA MINIMUM DESIGN LIFE OF 50 YEARS 1. 2.
- MINIMUM EXPOSURE CLASSIFICATION B2 MINIMUM COVER TO REINFORCEMENT - 40mm
- 3. DESIGN LIFE OF 100 YEARS MINIMUM EXPOSURE CLASSIFICATION - B1 MINIMUM COVER TO REINFORCEMENT - 40mm DESIGN CAPACITY OF PITS WITH CLASS L REINFORCEMENT 4.
- HAS BEEN REDUCED 20%
- 5. 6.
- ALLOWABLE SOIL BEARING PRESSURE IS 100KPA TOP REBATE TO SUIT RISER SHALL BE ACCORDING TO THE PIT ASSEMBLY DRAWINGS

		BOM:
ITEM #	QTY.	DESC
1	1	CORBEL WITH REE
2	2	FOOT ANCHOR 1.3

 $\bigcirc$ 

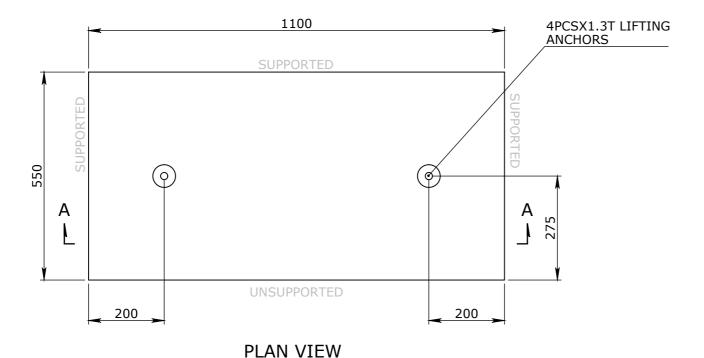

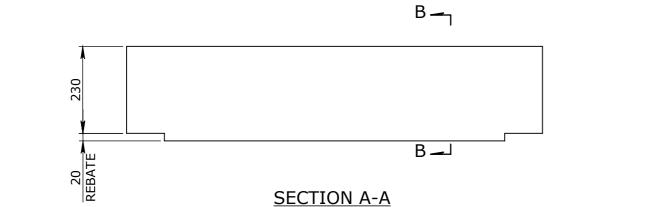

SECTION B-B

TOLERANCE NOTES:	3							CHK / APPR:				DRAFTED DATE:
1. CONCRETE TOLERANCES TO BE												30/06/2020
INCONJUCTION / ACCORDANCE WITH	2							DATE:				DRAFTED BY:
AS3600 - CONCRETE STRUCTURES	_   1											MLEE
2. WHEN A BROOME FINISH IS REQUIRED TH					_			RPEQ DOCUME	NT #.		HEAD OFFICE:	DATE LAST SAVED:
GENERAL TOLERANCE SUPERCEEDS THE	Rev. DESC	RIPTION		DAT	E	BY	APPROVED		-NI #.	1/1 REEVES COU	RT, BREAKWATER, VIC 3219	24/08/2020
FLATNESS TOLERANCE    3. WALL THICKNESS - DIMENSION AS NOTE			Ĵ	REVISION		ROI		]		P: (03) 5222	4526; F: (03) 5222 1914	LAST SAVED BY:
IS MINIMUM THICKNESS ONLY	'    GENERA	AL TOLERANCES							)			MLEE
4. CONCRETE GRADE - 40MPA UNLESS NOTE	NOMINAL:				FLATN	IESS: (NOT INCLU	DING BROOME FINISH)	WEIGHT:	361Kg		SCLOSED IN THIS DOCUMENT IS	4 .
OTHERWISE		UP TO 1000mm	1M AND	ABOVE				MATERIAL	JUING		S NOT WITHOUT THE EXPRESS S AUSTRALIA TO BE COPIED,	
5. DIMENSIONS ARE NOT INCLUSIVE OF	TOLERANCE	·			⊣+4m	m PFR 1	M WIDTH	MATERIAL:	CONCRETE 50MPA		/EN TO ANY OTHER PARTY IN ANY	
SEALANTS OF JOINTS		±5mm	1mm IN 200			IN 1M LÊ		IRF REF:	CONCRETE JUNIFA	FORM AND THAT ALL	COPYRIGHT, DESIGNS AND	DRAWN TO AS 1100 DO NOT SCALE
( 6. SURFACE FINISH - CLASS 4 (AS3610.1)	八		A MAXIMUM	0F 20mm				八	J	PATENTS VEST IN AUS	SPITS AUSTRALIA	FROM SHEET
		1			1		/		/	<u> </u>		

