
GENERAL NOTES:


CONCRETE GRADE TO BE 50 MPA MINIMUM DESIGN LIFE OF 50 YEARS 1. 2.

- MINIMUM EXPOSURE CLASSIFICATION B2 MINIMUM COVER TO REINFORCEMENT - 40mm
- 3. DESIGN LIFE OF 100 YEARS MINIMUM EXPOSURE CLASSIFICATION - B1 MINIMUM COVER TO REINFORCEMENT - 40mm
- DESIGN CAPACITY OF PITS WITH CLASS L REINFORCEMENT 4. HAS BEEN REDUCED 20%
- 5. 6.
- ALLOWABLE SOIL BEARING PRESSURE IS 100KPA TOP REBATE TO SUIT RISER SHALL BE ACCORDING TO THE PIT ASSEMBLY DRAWINGS

		BOM:
ITEM #	QTY.	DESCF
1	1	CORBEL WITH REBA
2	2	FOOT ANCHOR 1.3T

0

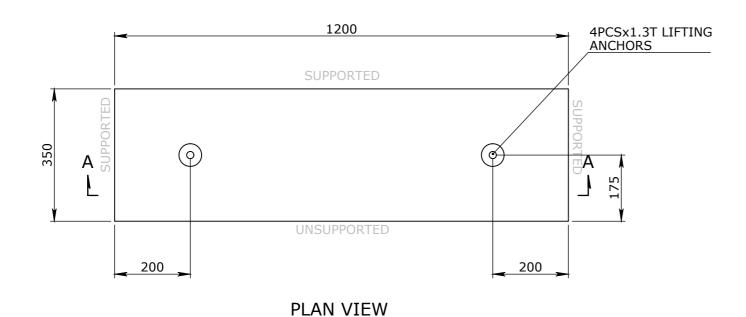

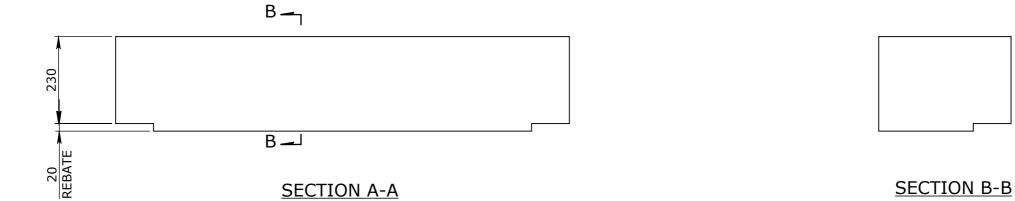

														12:
	TOLERANCE NOTES:	3							CHK / APPR:					DRAFTED DATE:
	1. CONCRETE TOLERANCES TO BE													30/06/2020
	INCONJUCTION / ACCORDANCE WITH	2							DATE:					DRAFTED BY:
	AS3600 - CONCRETE STRUCTURES	1												MLEE
	2. WHEN A BROOME FINISH IS REQUIRED THE GENERAL TOLERANCE SUPERCEEDS THE	Rev. DESCR			DAT	-	DV	APPROVED	RPEO DOCUME	NT #:		HEAD OFFICE:		DATE LAST SAVED
	FLATNESS TOLERANCE	REV. DESCR	IPTION		DAI	E	BY	APPROVED				- /		24/08/2020
	3. WALL THICKNESS - DIMENSION AS NOTED	GENERAL	TOLERANCES		REVISIO	V CONT	ROL		Д)	P: (03) 522	2 4526; F: (03)) 5222 1914	LAST SAVED BY:
	IS MINIMUM THICKNESS ONLY	-							WEIGHT:					MLEE
	4. CONCRETE GRADE - 40MPA UNLESS NOTED	NOMINAL:	UP TO 1000mm	1M AND		FLAIR	NESS: (NOT INCLU	DING BROOME FINISH)) (WEIGHT:	249Kg)	THE INFORMATION I CONFIDENTIAL AND			6-
	OTHERWISE 5. DIMENSIONS ARE NOT INCLUSIVE OF		09 10 10000000		ADUVE				MATERIAL:		CONSENT OF AUSPI	ITS AUSTRALIA 1	TO BE COPIED,	
	SEALANTS OF JOINTS	TOLERANCE:	_	1mm IN 200	mm UP TO			M WIDTH		CONCRETE 50MPA	REPRODUCED, OR G			DRAWN TO AS 11
	6. SURFACE FINISH - CLASS 4 (AS3610.1)		±5mm	A MAXIMUM			IN 1M LE	NGTH	IRF REF:		PATENTS VEST IN A			DO NOT SCALE FROM SHEET
6					-									

