

## **GENERAL NOTES:**

CONCRETE GRADE TO BE 50 MPA MINIMUM 1. 2.


- DESIGN LIFE OF 50 YEARS MINIMUM EXPOSURE CLASSIFICATION - B2 MINIMUM COVER TO REINFORCEMENT - 40mm
- 3. DESIGN LIFE OF 100 YEARS MINIMUM EXPOSURE CLASSIFICATION - B1 MINIMUM COVER TO REINFORCEMENT - 40mm
- DESIGN CAPACITY OF PITS WITH CLASS L REINFORCEMENT 4. HAS BEEN REDUCED 20%
- ALLOWABLE SOIL BEARING PRESSURE IS 100KPA 5. 6.
- TOP REBATE TO SUIT RISER SHALL BE ACCORDING TO THE PIT ASSEMBLY DRAWINGS

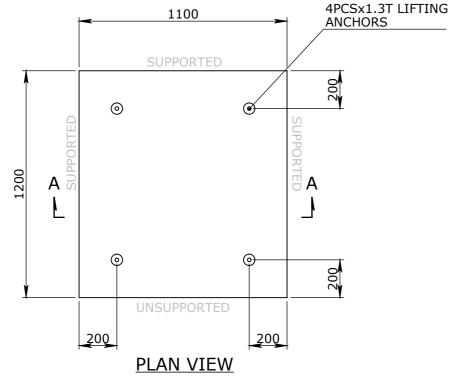

		BOM:
ITEM #	QTY.	DESC
1	1	CORBEL WITH REB
2	4	FOOT ANCHOR 1.3

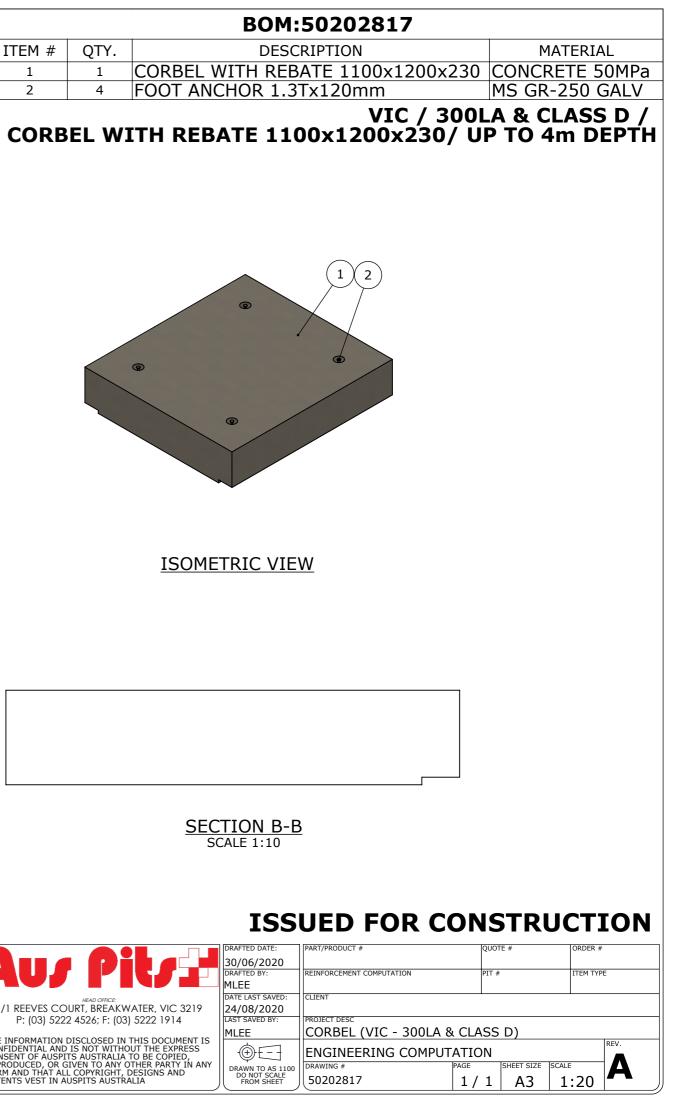



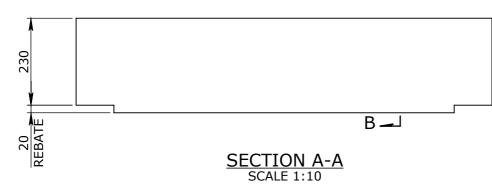

TOLERANCE NOTES:	3						!!'	CHK / APPR:				DRAFTED DATE:
1. CONCRETE TOLERANCES TO BE								C				30/06/2020
INCONJUCTION / ACCORDANCE WITH	2							DATE:				DRAFTED BY:
AS3600 - CONCRETE STRUCTURES	1											MLEE
2. WHEN A BROOME FINISH IS REQUIRED THE								RPEO DOCUME	NT #.		HEAD OFFICE:	DATE LAST SAVED:
	Rev. DESCR	IPTION		DATE	BY	APPROV	'ED   '	KPEQ DOCUME	NI #.	1/1 REEVES COU	RT, BREAKWATER, VIC 3219	24/08/2020
FLATNESS TOLERANCE 3. WALL THICKNESS - DIMENSION AS NOTED		TOUEDANGES	) [	REVISION							4526; F: (03) 5222 1914	LAST SAVED BY:
IS MINIMUM THICKNESS ONLY	GENERAL	TOLERANCES							)			MLEE
4. CONCRETE GRADE - 40MPA UNLESS NOTED	NOMINAL:				FLATNESS: (1	NOT INCLUDING BROOME FIN	NISH)	WEIGHT:	792Kg	THE INFORMATION DI	SCLOSED IN THIS DOCUMENT	
OTHERWISE		UP TO 1000mm	1M AND AB	OVE			IL		7.521(9		S NOT WITHOUT THE EXPRESS	
5. DIMENSIONS ARE NOT INCLUSIVE OF	TOUEDANIOE				+4mm P	ER 1M WID	тн 🛙	MATERIAL:	CONCRETE 50MPA		S AUSTRALIA TO BE COPIED, /EN TO ANY OTHER PARTY IN A	
SEALANTS OF JOINTS	TOLERANCE:	±5mm	1mm IN 200m			MLENGTH	11	IRF REF:	CUNCRETE SUMPA		COPYRIGHT, DESIGNS AND	DRAWN TO AS 1100 DO NOT SCALE
(6. SURFACE FINISH - CLASS 4 (AS3610.1)		± 511111	A MAXIMUM O	F 20mm	111 11		八	IN NEF.	J	PATENTS VEST IN AUS	SPITS AUSTRALIA	FROM SHEET
								$\sim$	/	<u> </u>		