GENERAL NOTES:

1. CONCRETE GRADE TO BE 50 MPA MINIMUM

2. DESIGN LIFE OF 50 YEARS

MINIMUM EXPOSURE CLASSIFICATION - B2 MINIMUM COVER TO REINFORCEMENT - 40mm

DESIGN LIFE OF 100 YEARS

MINIMUM EXPOSURE CLASSIFICATION - B1 MINIMUM COVER TO REINFORCEMENT - 40mm


4. DESIGN CAPACITY OF PITS WITH CLASS L REINFORCEMENT

HAS BEEN REDUCED 20%


ALLOWABLE SOIL BEARING PRESSURE IS 100KPA

6. TOP REBATE TO SUIT RISER SHALL BE ACCORDING TO THE

PIT ASSEMBLY DRAWINGS

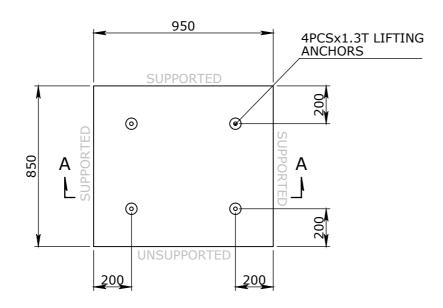


PLAN VIEW

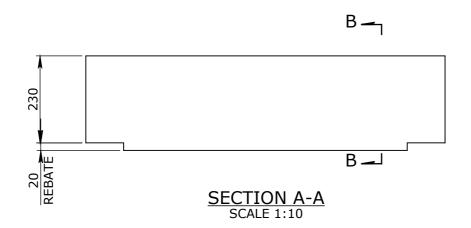


BOM:50202897			
ITEM #	QTY.	DESCRIPTION	MATERIAL
1	1	CORBEL WITH REBATE 950x850x230	CONCRETE 50MPa
2	4	FOOT ANCHOR 1.3Tx120mm	MS GR-250 GALV

VIC / 300LA & CLASS D / CORBEL WITH REBATE 950x850x230 / UP TO 4m DEPTH



ISOMETRIC VIEW

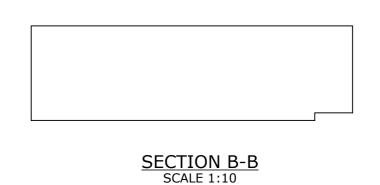

ISSUED FOR CONSTRUCTION

