GENERAL NOTES:

CONCRETE GRADE TO BE 50 MPA MINIMUM

DESIGN LIFE OF 50 YEARS

MINIMUM EXPOSURE CLASSIFICATION - B2 MINIMUM COVER TO REINFORCEMENT - 40mm

DESIGN LIFE OF 100 YEARS

MINIMUM EXPOSURE CLASSIFICATION - B1 MINIMUM COVER TO REINFORCEMENT - 40mm


DESIGN CAPACITY OF PITS WITH CLASS L REINFORCEMENT


HAS BEEN REDUCED 20%

ALLOWABLE SOIL BEARING PRESSURE IS 100KPA

TOP REBATE TO SUIT RISER SHALL BE ACCORDING TO THE

PIT ASSEMBLY DRAWINGS

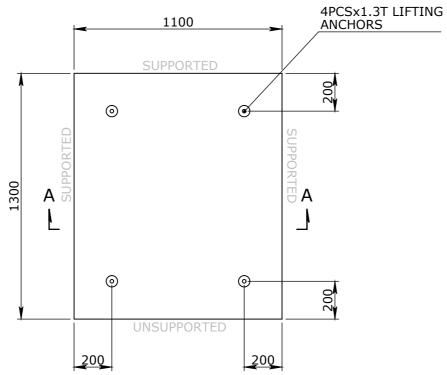


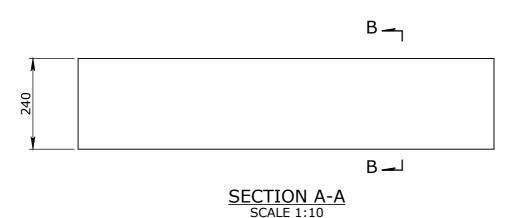

PLAN VIEW

BOM:50203875			
ITEM #	QTY.	DESCRIPTION	MATERIAL
1	1	CORBEL WITH GROUT TUBES 1100x1300x240	CONCRETE 50MPa
2	4	FOOT ANCHOR 1.3Tx120mm	MS GR-250 GALV

RMS / 300LA & CLASS D / UP TO 4m DEPTH CORBEL WITH GROUT TUBES 1100x1300x240

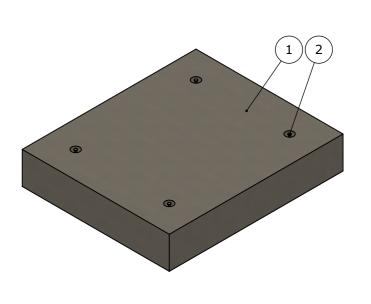

ISOMETRIC VIEW



SECTION B-B SCALE 1:10

ISSUED FOR CONSTRUCTION

