



BOM:50206869										
ITEM #	PART #	DESCRIPTION	WEIGHT							
1	50206869	SLEEPER COLLAR 1400mm TO SUIT 2 PART – PART A	312							
2	50201048	FERRULE ZP M12X50 C/W 10mm HOLE	0.1							
3	50201274	FOOT ANCHOR ZP 1.3TX65MM	0.1							

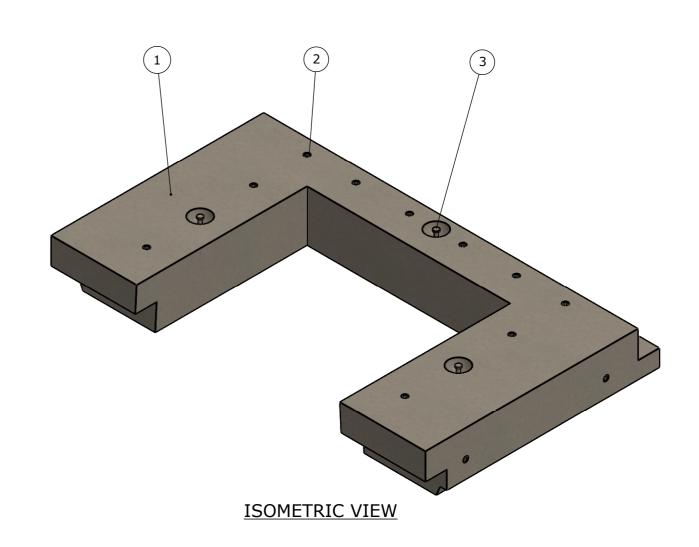

ISSUED FOR CLIENT REVIEW ONLY

CLIENT APPROVAL

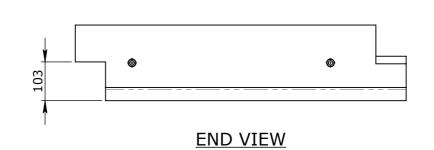

											ISSUE	DATE	CLIENT	Γ APPRO
UNCONTROLLED DOCUME	ENT WI	HEN PRIN	ITED									13/07/2022		
TOLERANCE NOTES:	3						CHK / APPR:			DRAFTED DATE:	PART/PRODUCT #	C	QUOTE #	ORDER #
CONCRETE TOLERANCES TO BE	1 -				_			∃ Infrastru	Cturo	13/07/2022	i L			
INCONJUCTION / ACCORDANCE WITH	1 2						DATE:	ıı ıı ıı asıı u		DRAFTED BY:	REINFORCEMENT COMPUTAT	ION P	PIT #	ITEM TY
AS3600 - CONCRETE STRUCTURES 2. WHEN A BROOM FINISH IS REOUIRED THE	1									D.PRUSAC	i			
	Rev. DESCRIPTION		DATE	BV	APPROVED	RPEQ DOCUMENT #:	Products A	Australia	DATE LAST SAVED: 13/07/2022	CLIENT				
FLATNESS TOLERANCE	(0.1220			l			41 -		radoto / taoti ana					
3. WALL THICKNESS - DIMENSION AS NOTED				SION CONTROL			八	/I A CRH COMPANY II		LAST SAVED BY:	PROJECT DESC			
IS MINIMUM THICKNESS ONLY	NOMINAL:		FI	FLATNESS: (NOT INCLUDING BROOME FINISH)		WEIGHT:			NBRADIC	i				
4. CONCRETE GRADE - 40MPA UNLESS NOTED OTHERWISE			1M AND ABOVE	TEATNESS. (NOT INCLUDING BROOME FINISH))(WEIGHT: Kg		RING & DEVELOPMENT:	⊕ € ∃	SLEEPER COLL	AD TO CUIT 2	DADT DAE	от Λ	
5. DIMENSIONS ARE NOT INCLUSIVE OF	(_	—	1mm DED	1M WIDTH	MATERIAL:		RADBROKE STREET			1		
SEALANTS OF JOINTS	TOLERANCE:		1mm IN 200mm UF	10	IN 1M LE		IRF REF:	BREAKWATER, VIC 3219 HEAT		DRAWN TO AS 1100	DRAWING #	PAGE	SHEET SIZE SC	
6 SURFACE FINISH - CLASS 4 (AS3610.1)	rl -	±5mm	Δ ΜΔΧΙΜΙΙΜ OF 20	mm	TIN TIM LL	LINGIII	IRF KEF:	1 1800 065 356 (07) 3	3714 0444	DO NOT SCALE	ENDN6060	1 /	1 1 1	1.10