**GENERAL NOTES:**1. CONCRETE GRADE TO BE 50 MPA MINIMUM

DESIGN LIFE OF 50 YEARS

MINIMUM EXPOSURE CLASSIFICATION - B2

MINIMUM COVER TO REINFORCEMENT - 40mm

3. DESIGN LIFE OF 100 YEARS

MINIMUM EXPOSURE CLASSIFICATION - B1

MINIMUM COVER TO REINFORCEMENT - 40mm

 DESIGN CAPACITY OF PITS WITH CLASS L REINFORCEMENT HAS BEEN REDUCED 20%

5. SPLICES IN REINFORCEMENT, UNLESS OTHERWISE NOTED, SHALL BE BY LAPPING AS FOLLOW:

GRADE 500 N8 BARS - MIN. 250mm GRADE 500 N12 BARS - MIN. 485mm

6. ALLOWABLE SOIL BEARING PRESSURE IS 100KPA

**DESIGN LOADS:** 

.. CLASS D TRAFFIC DESIGN LOAD - AS3996:2019 & AS5100:2017

 BOM:AP-EC-GSG99B-ENC 1300x1300x150


 ITEM #
 QTY.
 DESCRIPTION
 MATERIAL


 1
 1
 1300x1300x150 CLS B ENCASEMENT
 CONCRETE 50MPa

 2
 4
 FOOT ANCHOR 1.3Tx85mm
 MS GR-250 GALV

 3
 1
 GRATE SUMP ASY CLS B GMS - 900X900
 MS GR-250 GALV


GSG99B / CLASS B / 1300x1300x150 ENCASEMENT

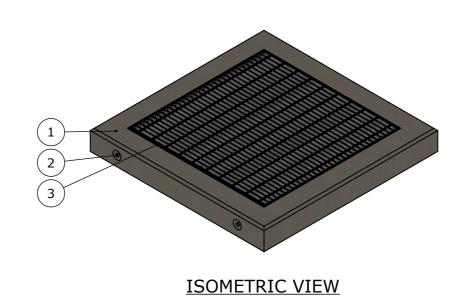

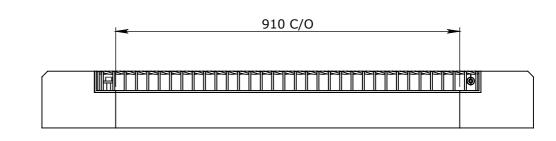





## **ISSUED FOR CONSTRUCTION**

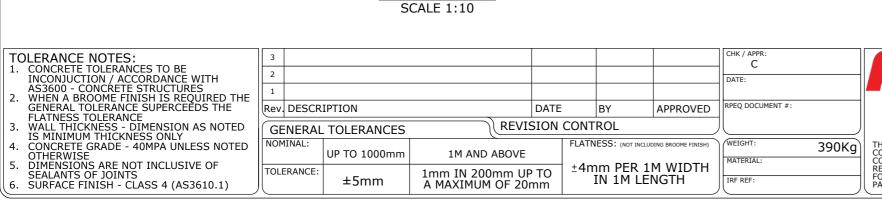


	122	DED FOR CO	NSIKU	CITON
	DRAFTED DATE: 15/07/2020	PART/PRODUCT #	QUOTE #	ORDER #
AU/ PR/J	DRAFTED BY:	REINFORCEMENT COMPUTATION	PIT #	ITEM TYPE
1/1 REEVES COURT, BREAKWATER, VIC 3219	DATE LAST SAVED: 9/09/2020	CLIENT	_1	
P: (03) 5222 4526; F: (03) 5222 1914  THE INFORMATION DISCLOSED IN THIS DOCUMENT IS	MLEE	ENCASEMENT (CLASS B)		Ta a .
CONFIDENTIAL AND IS NOT WITHOUT THE EXPRESS CONSENT OF AUSPITS AUSTRALIA TO BE COPIED, REPRODUCED, OR GIVEN TO ANY OTHER PARTY IN ANY	⊕ € ∃	ENGINEERING COMPUTATION		CALE REV.
ORM AND THAT ALL COPYRIGHT, DESIGNS AND ATENTS VEST IN AUSPITS AUSTRALIA	DRAWN TO AS 1100 DO NOT SCALE FROM SHEET	AP-EC-GSG99B-ENC 1300X1300X150	[ [	1:20 UD

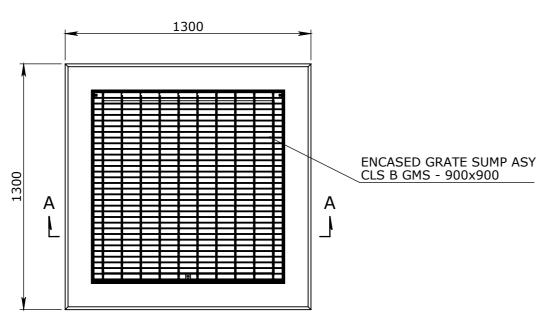

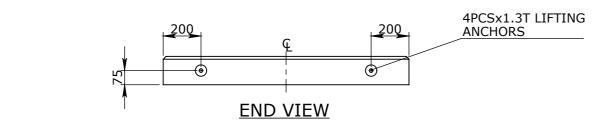

**PLAN VIEW** 

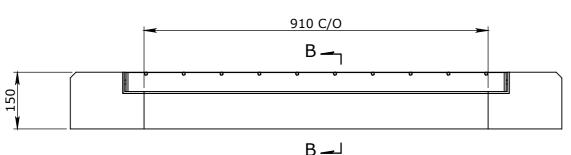

SECTION A-A