


CONCRETE PRODUCT NOTE:


1. REFER TO GENERAL TOLERANCES UNO
2. GRADE OF CONCRETE - PIT:CONCRETE FIBRE 40MPA /
TURRET: CONCRETE 40MPA
3. ALL LIFTING POINTS TO BE USED WHEN LIFTING
4. MINIMUM STRENGTH OF CONCRETE SHALL BE 25MPa AT
THE TIME OF LIFTING
5. COVER TO REINFORCEMENT TO BE 50mm
6. REFER TO ANCON LIFTING ARRANGEMENT PLAN


	BOM:502014/3-01					
ITEM #	QTY.	PART #	DESCRIPTION	VOLUME		
1	1	50201473		1.64		
2	1	50201048	FERRULE ZP M12x50 C/W 10mm HOLE	0.12		

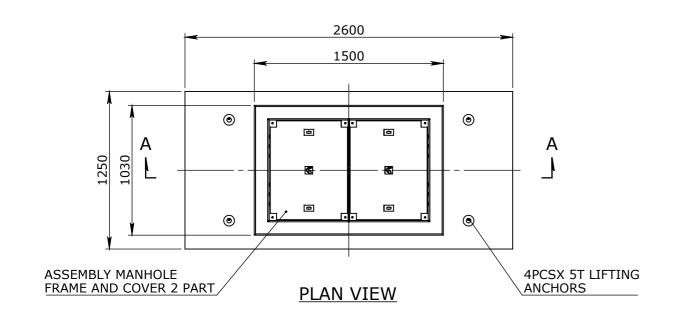

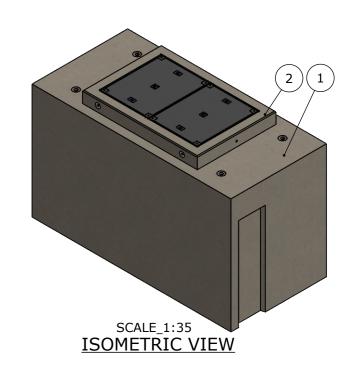

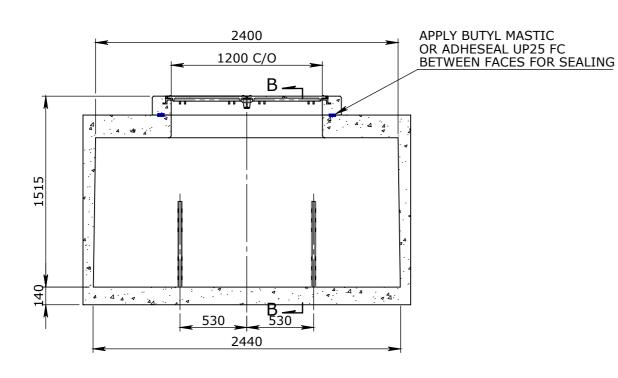

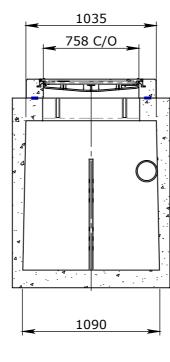

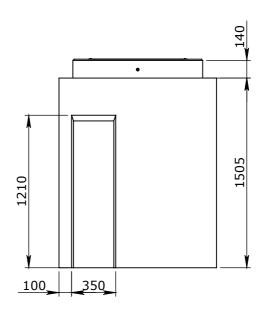

**SECTION A-A** 

±5mm

**SECTION B-B** 

**END VIEW** 

TOLERANCE:

UI'	NCONTROLLED DOCUME	
TC	DLERANCE NOTES:	
1.	CONCRETE TOLERANCES TO BE	╟
	INCONJUCTION / ACCORDANCE WITH	L
_	AS3600 - CONCRETE STRUCTURES	
2.	WHEN A BROOM FINISH IS REQUIRED THE	ŀ
	GENERAL TOLERANCE SUPERCEDES THE	Ų
2	FLATNESS TOLERANCE	/
٥.	WALL THICKNESS - DIMENSION AS NOTED IS MINIMUM THICKNESS ONLY	1
4.	CONCRETE GRADE - 40MPA UNLESS NOTED	lt
٦.	OTHERWISE	
5.	DIMENSIONS ARE NOT INCLUSIVE OF	H
-	SEALANTS OF JOINTS	$\  \cdot \ $
6.	SURFACE FINISH - CLASS 4 (AS3610.1)	
	. , ,	\

V	IVVI	JEIN BRIII	IIED					
3								CHK /
2								DATE:
1								
lev.	v DESCRIPTION			DATE	E	BY	APPROVED	RPEQ D
GE	NERAL	TOLERANCES	J	REVISION	CONT	ROL		
MON	IINAL:	UP TO 1000mm	1M AND A	ABOVE	FLATN	ESS: (NOT INCLUD	DING BROOME FINISH)	WEIGH

1mm IN 200mm UP TO A MAXIMUM OF 20mm

4318.8Kg ±4mm PER 1M WIDTIMATERIAL <NOT SPECIFIED>

## Infrastructure Products Australia

A CRH COMPANY

91 STRADBROKE STREET 1 REEVES COURT BREAKWATER, VIC 3219 HEATHWOOD, QLD 4110

	DRAFTED DATE:	PART/PRODUCT #	QUOTE #	ORDER #			
	11/07/2022	50201473-01					
	DRAFTED BY:	REINFORCEMENT COMPUTATION	PIT #	ITEM TYPE			
	DATE LAST SAVED:	CLIENT					
	30/05/2023	CUBIS SYSTEMS/AUSPITS					
	LAST SAVED BY:	PROJECT DESC					
	NBRADIC	CATALOGUE ITEM					
	⊕ €=	PIT CONCRETE MANHOLE PF4 WITH FLOOR					
0	DRAWN TO AS 1100	DRAWING # PAG	GE SHEET SIZE	SCALE			
	DO NOT SCALE FROM SHEET	50201473-01	1 / 1 A3	1:30			

IN 1M LENGTH