


CONCRETE NOTE:


- 1. REFER TO GENERAL TOLERANCES UNO
- 2. GRADE OF CONCRETE 40MPA
- 3. ALL LIFTING POINTS TO BE USED WHEN LIFTING
- 4. MINIMUM STRENGTH OF CONCRETE SHALL BE
- 25MPA AT THE TIME OF LIFTING
- 5. REFER TO BVCI-INS-C-001 (STD INSTALLATION GUIDE) FOR INSTALLATION DETAILS
- 6. REFER TO ANCON LIFTING ARRANGEMENT PLAN

BOM:50201726 RISER CONCRETE 200mm TO SUIT 1100x900 PIT					
ITEM #	QTY.	PART #	DESCRIPTION	MATERIAL	VOLUME
1	4	50201097	EYE ANCHOR ZP 1.3Tx65mm	MS GR250 GALVANISED	
2	8	50201105	FERRULE ZP M12x50 WITH 65x50 REO	MIXED REINFORCEMENT STEEL	
3	2	50202447	CATCH BOX SUIT SL1 AND SL2	MA GR25 - GALVANISED	
4		50201726	CONCRETE 40MPa	CONCRETE 40MPa	0.19

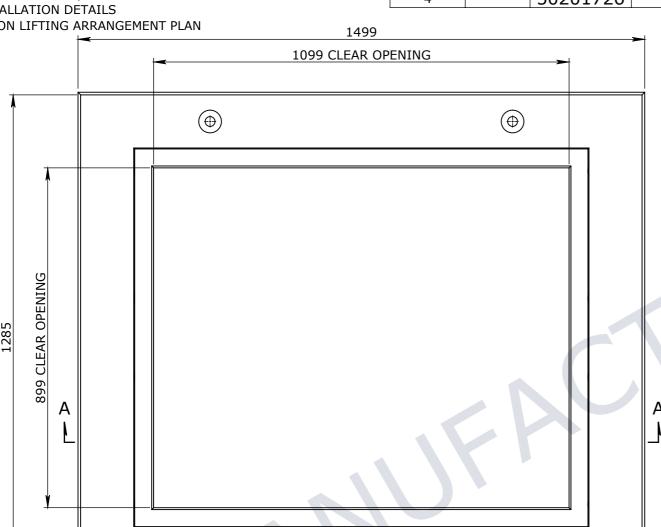

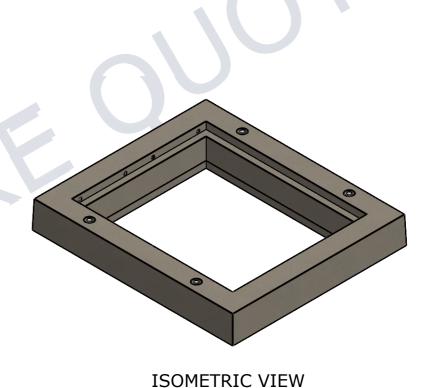

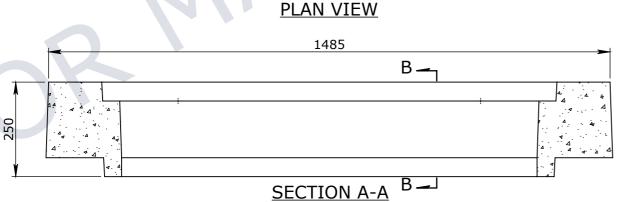

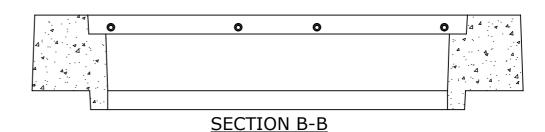

TOLERANCE NOTES:

1. CONCRETE TOLERANCES TO BE
 INCONJUCTION / ACCORDANCE WITH
 AS3600 - CONCRETE STRUCTURES

2. WHEN A BROOM FINISH IS REQUIRED THE
 GENERAL TOLERANCE SUPERCEDES THE
 FLATNESS TOLERANCE

3. WALL THICKNESS - DIMENSION AS NOTED
 IS MINIMUM THICKNESS ONLY

4. CONCRETE GRADE - 40MPA UNLESS NOTED
 OTHERWISE

OTHERWISE
DIMENSIONS ARE NOT INCLUSIVE OF
SEALANTS OF JOINTS
SURFACE FINISH - CLASS 4 (AS3610.1)

2 NOMINAL: TOLERANCE:

 \oplus

Rev. DESCRIPTION DATE BY APPROVED REVISION CONTROL GENERAL TOLERANCES FLATNESS: (NOT INCLUDING BROOME FINISH) 1M AND ABOVE UP TO 1000mm

1mm IN 200mm UP TO A MAXIMUM OF 20mm

RPEQ DOCUMENT #: 1454.20Kg 40MPA CONCRETE

Infrastructure Products Australia

A CRH COMPANY

1 REEVES COURT

91 STRADBROKE STREET BREAKWATER, VIC 3219 HEATHWOOD, QLD 4110

4/08/2022 50201726 CUBIS SYSTEMS 10/10/2023 CABEYSINGH

50201726

RISER CONCRETE 200mm TO SUIT 1100x900 PIT RISER CONCRETE 200mm TO SUIT 1100x900 PIT

А3

 \oplus

±4mm PER 1M WIDTH

IN 1M LENGTH